


0156-19XXL

PCB > PCB -

:2026-07-05 :V1

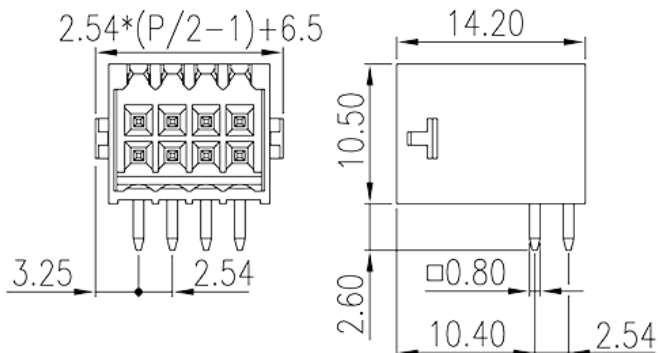

Pitch : 2.54 mm, 150V, 5A

| | |
|------------|---|
| | PCB Connector – Socket, Reflow soldering |
| | PCB Connector – Socket |
| (mm) | 2.54 |
| | Black (default) |
| | Without |
| | Reflow Soldering (Temperature condition according to standard IPC/JEDEC J-STD-020E) |
| (mm) | $2.54 * (P/2 - 1) + 6.5$ |
| (mm) | 14.2 |
| (mm) | 10.5 |
| (x) (mm) | 0.8x0.8 |
| PCB (mm) | 1.4 |
| () | 06P~44P |
| | Double level |
| | HIGH-TEMPERATURE PLASTICS |
| | IIIa |



| | |
|-------|-----------------|
| UL 94 | V0 |
| | 500M at DC 500V |
| | COPPER ALLOY |
| | Tin PLATED |
| MSL | I |

-IEC

| | |
|-------------|-----|
| (V) | 160 |
| (A) | 6 |
| (II/2)(V) | 160 |
| (III/2)(V) | 160 |
| (III/3)(V) | 32 |
| (II/2)(KV) | 2.5 |
| (III/2)(KV) | 2.5 |
| (III/3)(KV) | 2.5 |

-UL

| | |
|---------------------|-----|
| (UL/CUL Group B)(V) | 150 |
| (UL/CUL Group B)(A) | 5 |

&

| | |
|---------------|-----|
| 가 (YES or NO) | YES |
| | 120 |
| | -40 |

UL

| | |
|--------------|-----|
| (Group B)(V) | 150 |
| (Group B)(A) | 5 |

CUL

| | |
|--------------|-----|
| (Group B)(V) | 150 |
| (Group B)(A) | 5 |

