


## 0159-31XX

PCB &gt; PCB -

:2026-02-10 :V1

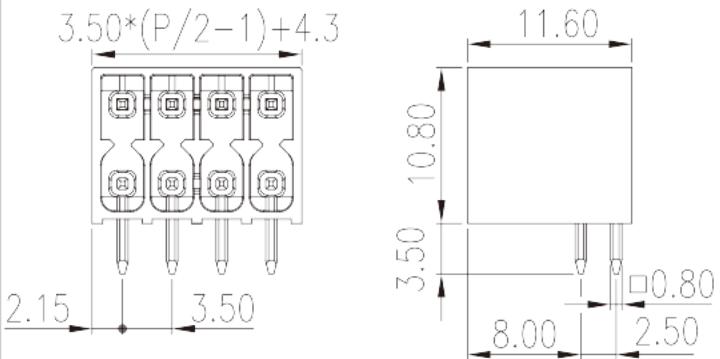

Pitch : 3.50 mm, 150V, 8A

	PCB Connector – Socket, Wave soldering
	PCB Connector – Socket
(mm)	3.50
	Black (default)
	Without
	Wave soldering
(mm)	3.50*(P/2-1)+4.3
(mm)	11.6
(mm)	10.8
(   x   ) (mm)	0.8x0.8
PCB (mm)	1.4
(   )	04P~40P
	Double level

UL 94	PA I V0
-------	---------------

	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

**-IEC**

(V)	250
(A)	8
(II/2)(V)	250
(III/2)(V)	160
(III/3)(V)	160
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	8

**&**

가	(YES or NO)	YES
		120
		-40

**UL**

(Group B)(V)	150
(Group B)(A)	8
(Group C)(V)	50
(Group C)(A)	8
(Group D)(V)	300
(Group D)(A)	8

(Group B)(V)	150
(Group B)(A)	8
(Group C)(V)	50

(Group C)(A)	8
(Group D)(V)	300
(Group D)(A)	8

