


0171-10XX

PCB > PCB

:2026-02-10 :V1

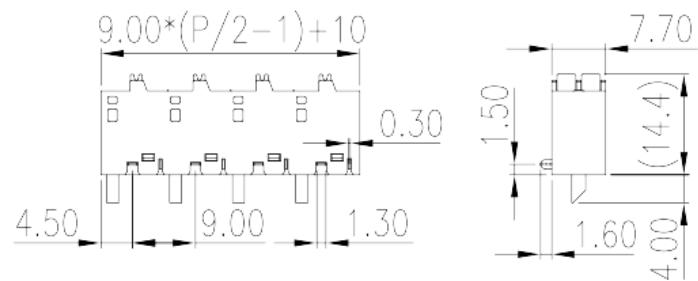

Pitch : 9.00mm, 300V, 8A

	PCB Terminal Blocks, Push-in Design
	PCB Terminal Blocks
(mm)	9.00
	Black (default)
	Push in design
	Without
	Wave soldering
(mm)	9.00*(P/2-1)+10.0
(mm)	18.4
(mm)	7.7
(x) (mm)	0.3x1.3
PCB (mm)	0.6x1.8
()	02P~08P
	Double level

	PA
	I

UL 94

V0

500M at DC 500V

COPPER ALLOY

Tin PLATED

-IEC

(V)	320
(A)	14
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	1.5
(mm ²)	0.2
(mm ²)	1.5
(mm ²) , , ,	0.25
(mm ²) , , ,	1
(mm ²) , , ,	0.25
(mm ²) , , ,	1
Philips	0.4x2.5
	7~8

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	8
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	8
UL/CUL	AWG
UL/CUL	AWG
UL/CUL	AWG

UL/CUL

AWG

16

&




가	(YES or NO)	YES
		120
		-40

UL

(Group B)(AWG)	28~16
(Group B)(V)	300
(Group B)(A)	8
(Group D)(AWG)	28~16
(Group D)(V)	300
(Group D)(A)	8

CUL

(Group B)(AWG)	28~16
(Group B)(V)	300
(Group B)(A)	8
(Group D)(AWG)	28~16
(Group D)(V)	300
(Group D)(A)	8

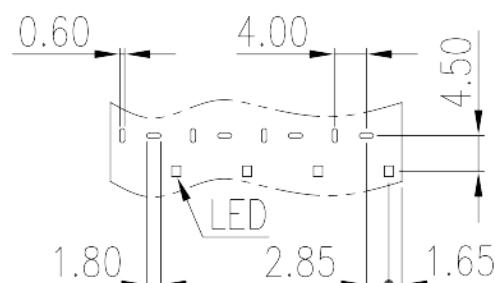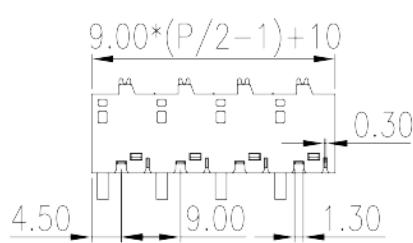



Delight Through Connections

