


0171-21XX

PCB > PCB

:2026-05-14 :V1

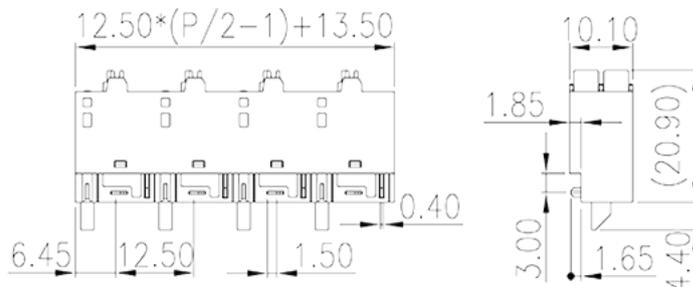

Pitch : 12.50 mm, 300V, 15A

PCB Terminal Blocks, Push-in Design	
PCB Terminal Blocks	
(mm)	12.50
	Black (default)
	Push in design
	Without
	Wave soldering
(mm)	$12.50 \times (P/2 - 1) + 13.5$
(mm)	25.3
(mm)	10.1
() x () (mm)	0.4x1.5
PCB (mm)	0.7x2.0
()	02P~08P
	Double level
	PA
	I



UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	320
(A)	20
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	2.5
(mm ²)	0.2
(mm ²)	2.5
(mm ²) , ,	0.25
(mm ²) , ,	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1.5
Width)(mm) (Blade thickness x	0.4x2.5
	9~10

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	24
UL/CUL AWG	12

UL/CUL	AWG	24
UL/CUL	AWG	12

&

가	(YES or NO)	YES
		120
		-40

