


0171-21XX

PCB > PCB :2025-08-08 :V1



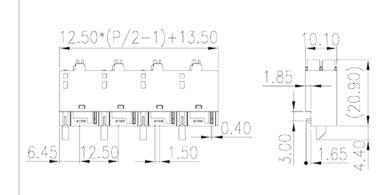

Pitch: 12.50 mm, 300V, 15A

	PCB Terminal Blocks, Push-in Design
	PCB Terminal Blocks
(mm)	12.50
	Black (default)
	Push in design
	Without
	Wave soldering
(mm)	12.50*(P/2-1)+13.5
(mm)	25.3
(mm)	10.1
(x) (mm)	0.4x1.5
PCB (mm)	0.7x2.0
()	02P~08P
	Double level

PA
I


UL 94	VO
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED
-IEC	
(V)	320
(A)	20
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	2.5
(mm ²)	0.2
(mm²)	2.5
(mm ²)	0.25
(mm ²)	1.5
(mm ²)	0.25
(mm ²)	1.5
(Blade thickness x Width)(mm)	0.4x2.5
	9~10
-UL	
(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	24
UL/CUL AWG	12




UL/CUL	AWG	24
UL/CUL	AWG	12

&

가 (YES or NO)	YES
	120
	-40

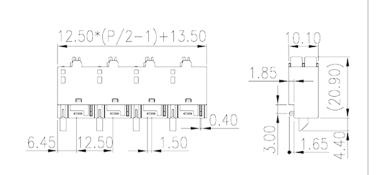



CE

