



AKK2.5-D03

DIN

>

:2026-07-04

:1.1

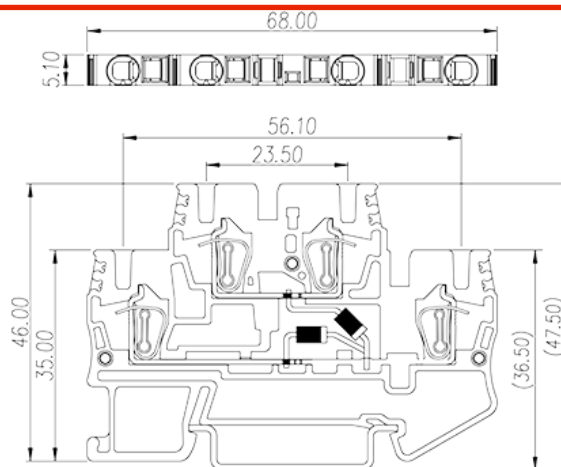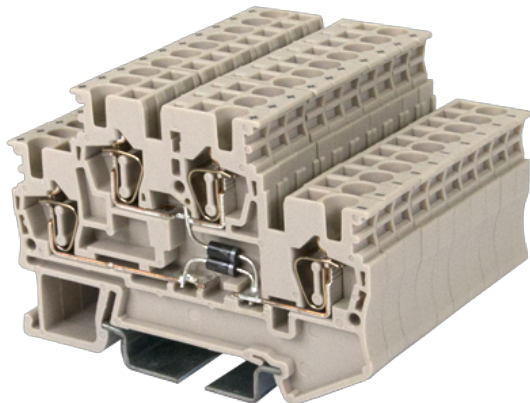

250V, 0.5A, Beige (default)

| | |
|-------|---|
| | DIN Rail terminal blocks, Diode terminal blocks |
| | Diode terminal blocks |
| | Beige (default) |
| | Spring Clamp Connection |
| | Rail Mounting |
| (mm) | 68 |
| (mm) | 5.1 |
| (mm) | 46 |
| | Double level |
| | 4 |
| | PA |
| | I |
| UL 94 | V0 |
| | 500M at DC 500V |

-IEC

| | | |
|--------------------|-----------------------------------|---------|
| (V) | | 250 |
| (A) | | 0.5 |
| (III/3)(V) | | 250 |
| (II/2)(KV) | | 8 |
| (III/2)(KV) | | 8 |
| (III/3)(KV) | | 8 |
| (mm ²) | | 0.2 |
| (mm ²) | | 4 |
| (mm ²) | | 0.2 |
| (mm ²) | | 2.5 |
| (mm ²) | , | 0.25 |
| (mm ²) | , | 2.5 |
| (mm ²) | , | 0.25 |
| (mm ²) | , | 2.5 |
| | ² (mm ²) , | 0.5 |
| | ² (mm ²) , | 0.5 |
| Width)(mm) | (Blade thickness x | 0.6x3.5 |
| | | 10 |
| | | TS-35 |
| | | YES |
| | | NO |

-UL

| | | |
|---------------------|-----|-----|
| (UL/CUL Group B)(V) | | 250 |
| (UL/CUL Group B)(A) | | 0.5 |
| (UL/CUL Group C)(V) | | 250 |
| (UL/CUL Group C)(A) | | 0.5 |
| UL/CUL | AWG | 30 |
| UL/CUL | AWG | 12 |
| UL/CUL | AWG | 30 |
| UL/CUL | AWG | 12 |

&

| | |
|---------------|-----|
| (YES or NO) | YES |
| 가 (YES or NO) | YES |
| | 120 |
| | -40 |

