


# 0191-01XX

PCB > PCB -

:2026-05-14 :1.1

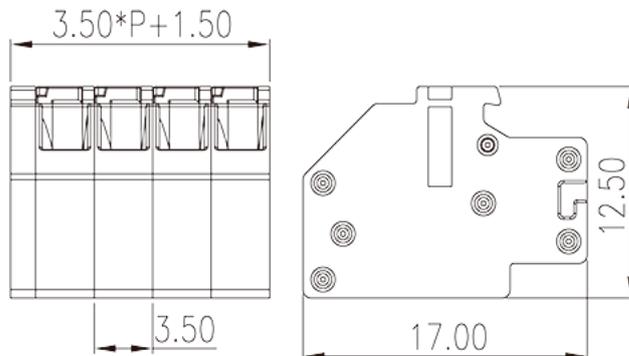

Pitch : 3.50 mm, 150V, 2A

	PCB Connector – Plug, Push-in Design
	Push-in Design
(mm)	3.50
	Black (default)
	Push in Design
	Without
(mm)	3.50*P+1.5
(mm)	17
(mm)	12.5
( )	02P~20P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	STAINLESS STEEL

Tin PLATED

**-IEC**

(V)	160
(A)	4
(II/2)(V)	200
(III/2)(V)	160
(III/3)(V)	100
(II/2)(KV)	3
(III/2)(KV)	3
(III/3)(KV)	3
(mm <sup>2</sup> )	0.5
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> )	0.5
(mm <sup>2</sup> )	1.5
	8~9

**-UL**

(UL/CUL Group B)(V)	150
(UL/CUL Group B)(A)	2
UL/CUL AWG	28
UL/CUL AWG	16
UL/CUL AWG	28
UL/CUL AWG	16

**&**

가 (YES or NO)	YES
	120
	-40

**UL**

(Group B)(AWG)	28~16
(Group B)(V)	150
(Group B)(A)	2

# CUL

(Group B) (AWG)	28~16
(Group B) (V)	150
(Group B) (A)	2

