


# 0221-25XX-BK

PCB > PCB -

:2026-05-14 :V1

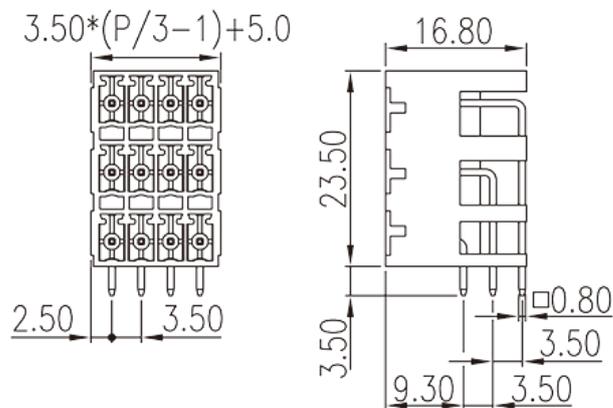

Pitch : 3.50 mm, 300V, 8A

	PCB Connector – Socket, Wave soldering
	PCB Connector – Socket
(mm)	3.5
	Black (default)
	Without
	Wave soldering
(mm)	$3.50 \times (P/3 - 1) + 5$
(mm)	16.8
(mm)	23.5
( x ) (mm)	0.8x0.8
PCB (mm)	1.3~1.4
( )	06P~72P
	PBT
	IIIa
UL 94	V0
	500M at DC 500V



	COPPER ALLOY
	Tin PLATED

**-IEC**

(V)	250
(A)	8
(II/2)(V)	250
(III/2)(V)	150
(III/3)(V)	150
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	8

**&**

가 (YES or NO)	YES
	120
	-40

**UL**

(Group B)(V)	300
(Group B)(A)	8

**VDE**

(V)	320
(A)	8

--	--

