


# 0221-41XXL



PCB &gt; PCB -

:2026-02-09

:V1

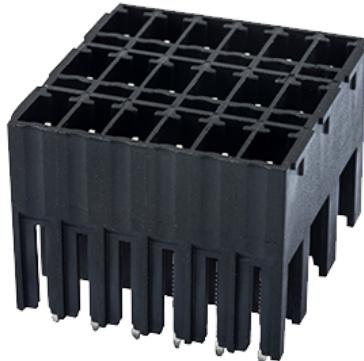

3.50\*(P/3-1)+5.0



Pitch : 3.50 mm, 300V, 8A

	PCB Connector – Socket, Reflow soldering
	PCB Connector – Socket
(mm)	3.50
	Black (default)
	Without
	Reflow Soldering (Temperature condition according to standard IPC/JEDEC J-STD-020E)
(mm)	3.50*(P/3-1)+5.0
(mm)	23.5
(mm)	16.8
(   x   ) (mm)	0.8x0.8
PCB (mm)	1.3~1.4
(   )	06P~72P
	Triple level

HIGH-TEMPERATURE PLASTICS

I

UL 94

V0

500M at DC 500V

COPPER ALLOY

Tin PLATED

MSL

2

**-IEC**

(V)	320
(A)	8
(II/2)(V)	320
(III/2)(V)	200
(III/3)(V)	200
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	8

**&**

가	(YES or NO)	YES
		120
		-40

