



DK16N

DIN

>

:2026-02-09

:1.2

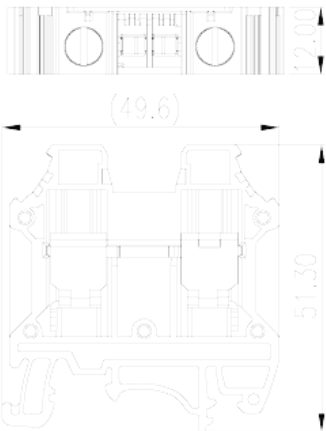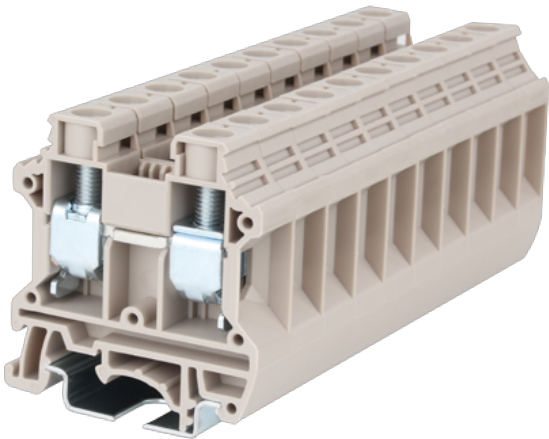

M5, 600V, 100A, Beige (default)

	Single Level Feed-through Terminal Block, Screw Connection
	Single Level Feed-through Terminal Block,
	Beige (default)
	Screw connection
	Rail mounting
(mm)	49.6
(mm)	12
(mm)	51.3
()	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)	1000
(A)	76
(III/3)(V)	1000
(III/3)(KV)	8
(mm ²)	1.5
(mm ²)	25
(mm ²)	1.5
(mm ²)	16
(mm ²) , ,	1.5
(mm ²) , ,	16
(mm ²) , ,	1.5
(mm ²) , ,	16
2 (mm ²)	1.5
2 (mm ²)	6
2 (mm ²)	1.5
2 (mm ²)	6
2 (mm ²) , ,	1.5
2 (mm ²) , ,	6
2 (mm ²) , ,	1.5
2 (mm ²) , ,	10
	M5
Width)(mm) (Blade thickness x	1.0x5.5
Philips	PH2
(N.m)	2.0
(N.m)	3.4
	14~16
	TS-35、TS-35/15
	YES
	NO

-UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	100
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	100
UL/CUL AWG	14
UL/CUL AWG	3
UL/CUL AWG	14
UL/CUL AWG	3

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	14~3
(Group B)(V)	600
(Group B)(A)	100
(Group C)(AWG)	14~3
(Group C)(V)	600
(Group C)(A)	100

CUL

(Group B)(AWG)	14~3
(Group B)(V)	600
(Group B)(A)	100
(Group C)(AWG)	14~3
(Group C)(V)	600
(Group C)(A)	100

VDE

(mm ²)	1.5~16
--------------------	--------

(V)	1000
(A)	76

