


0225-47XX

PCB > PCB -

:2026-03-30 :V1

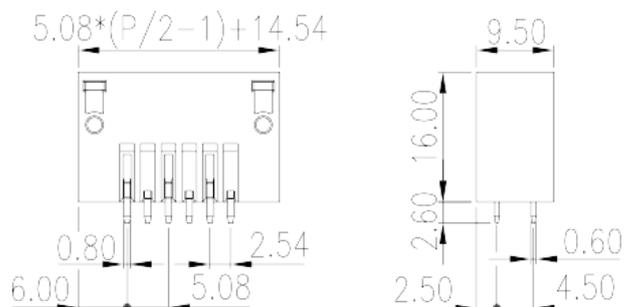

Pitch : 5.08 mm, 300V, 12A

	PCB Connector – Socket, Wave soldering
	PCB Connector – Socket
(mm)	5.08
	Black (default)
	With threaded flange
	Wave soldering
(mm)	$5.08 \times (P/2 - 1) + 14.54$
(mm)	9.5
(mm)	16
(x) (mm)	0.6x0.8
PCB (mm)	1.2
()	04P~40P
	Double level
	PBT
	IIIa
UL 94	V0



	1000M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	320
(A)	14
(II/2)(V)	320
(III/2)(V)	320
(III/3)(V)	200
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(N.m)	0.1

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	12
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10

&

가 (YES or NO)	YES
	120
	-40

UL

(Group B)(V)	300
(Group B)(A)	12
(Group D)(V)	300
(Group D)(A)	10

CUL

(Group B)(V)	300
(Group B)(A)	12

(Group D)(V)	300
(Group D)(A)	10

