
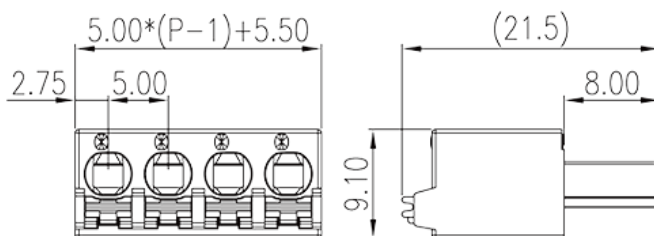


# 0226-03XX

PCB > PCB -

:2026-02-10 :1.1

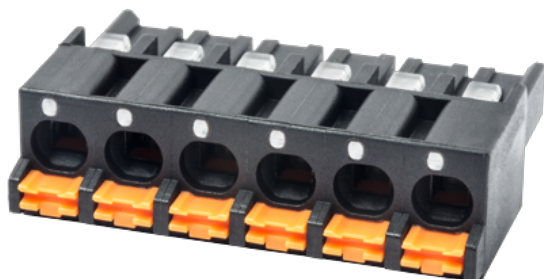

Pitch : 5.00 mm, 300V, 10A

	PCB Connector – Plug, Push-in Design
	PCB Connector – Plug
(mm)	5.00
	Black (default)
	Push in Design
	Without
(mm)	$5.00 * (P-1) + 5.5$
(mm)	21.5
(mm)	9.1
( )	02P~16P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

Tin PLATED

**-IEC**

(V)	630
(A)	17.5
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	1.5
	8~9

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	10
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL                      AWG	24
UL/CUL                      AWG	16
UL/CUL                      AWG	24
UL/CUL                      AWG	16

**&**

가            (YES or NO)	YES
	120
	-40

**UL**

(Group B)(AWG)	28~16
(Group B)(V)	300

(Group B)(A)	10
(Group D)(AWG)	28~16
(Group D)(V)	300
(Group D)(A)	10

## CUL

(Group B)(AWG)	28~16
(Group B)(V)	300
(Group B)(A)	10
(Group D)(AWG)	28~16
(Group D)(V)	300
(Group D)(A)	10

