



DK35N

DIN

>

:2026-07-04

:1.2

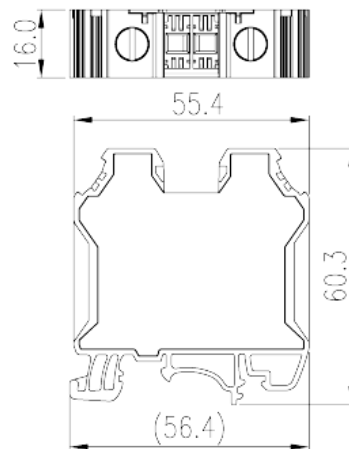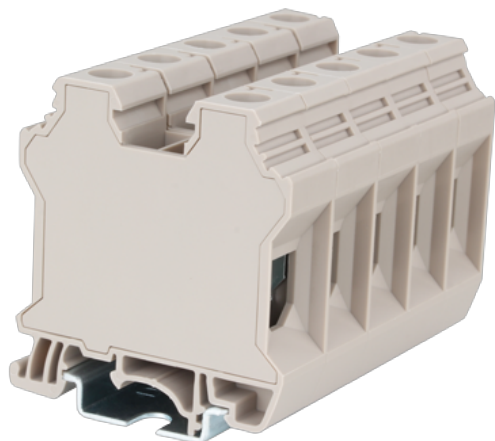

M6, 600V, 150A, Beige (default)

| | |
|-------|--|
| | Single Level Feed-through Terminal Block, Screw Connection |
| | Single Level Feed-through Terminal Block, |
| | Beige (default) |
| | Screw connection |
| | Rail mounting |
| (mm) | 56.4 |
| (mm) | 16 |
| (mm) | 60.3 |
| () | 1P |
| | Single level |
| | 2 |
| | PA |
| | I |
| UL 94 | V0 |
| | 500M at DC 500V |

-IEC

| | | |
|---------------------------------|--------------------|----------------|
| (V) | | 1000 |
| (A) | | 125 |
| (III/3)(V) | | 1000 |
| (III/3)(KV) | | 8 |
| (mm ²) | | 1.5 |
| (mm ²) | | 50 |
| (mm ²) | | 1.5 |
| (mm ²) | | 35 |
| (mm ²) | , | 1.5 |
| (mm ²) | , | 35 |
| (mm ²) | , | 1.5 |
| (mm ²) | , | 35 |
| 2 | (mm ²) | 1.5 |
| 2 | (mm ²) | 16 |
| 2 | (mm ²) | 1.5 |
| 2 | (mm ²) | 10 |
| (mm ²) ² | , | 1.5 |
| (mm ²) ² | , | 10 |
| (mm ²) ² | , | 1.5 |
| (mm ²) ² | , | 10 |
| | | M6 |
| Width)(mm) | (Blade thickness x | 1.0x5.5 |
| Philips | | PH3 |
| (N.m) | | 3.5~6.9 |
| (N.m) | | 3.5 |
| (N.m) | | 6.9 |
| | | 14~16 |
| | | TS-35、TS-35/15 |
| | | NO |



| | |
|--|----|
| | NO |
|--|----|

-UL

| | |
|---------------------------------|-----|
| (UL/CUL Group B)(V) | 600 |
| (UL/CUL Group B)(A) | 150 |
| (UL/CUL Group C)(V) | 600 |
| (UL/CUL Group C)(A) | 150 |
| UL/CUL AWG | 12 |
| UL/CUL AWG | 1/0 |
| UL/CUL AWG | 12 |
| UL/CUL AWG | 1/0 |

&

| | |
|---------------|-----|
| (YES or NO) | YES |
| 가 (YES or NO) | NO |
| | 120 |
| | -40 |

UL

| | |
|----------------|--------|
| (Group B)(AWG) | 12~1/0 |
| (Group B)(V) | 600 |
| (Group B)(A) | 150 |
| (Group C)(AWG) | 12~1/0 |
| (Group C)(V) | 600 |
| (Group C)(A) | 150 |

CUL

| | |
|----------------|--------|
| (Group B)(AWG) | 12~1/0 |
| (Group B)(V) | 600 |
| (Group B)(A) | 150 |
| (Group C)(AWG) | 12~1/0 |
| (Group C)(V) | 600 |
| (Group C)(A) | 150 |

VDE



| | |
|--------------------|--------|
| (mm ²) | 1.5~35 |
| (V) | 1000 |
| (A) | 125 |

