


DK2.5N-TR

DIN

>

:2026-05-14

:1.2

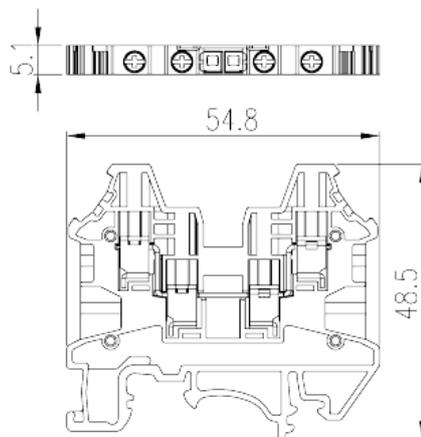

M2.5, 600V, 20A, Beige (default)

	Single Level Feed-through Terminal Block, Screw Connection
	Single Level Feed-through Terminal Block,
	Beige (default)
	Screw connection
	Rail mounting
(mm)	54.8
(mm)	5.1
(mm)	48.5
()	1P
	Single level
	4
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)		1000
(A)		24
(III/3)(V)		1000
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm ²)		0.14
(mm ²)		4
(mm ²)		0.14
(mm ²)		2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
(mm ²)	,	0.25
(mm ²)	,	1.5
2	(mm ²)	0.14
2	(mm ²)	2.5
2	(mm ²)	0.14
2	(mm ²)	1.5
(mm ²) 2	,	0.25
(mm ²) 2	,	1.5
2	(mm ²)	0.5
2	(mm ²)	1
		M2.5
Width)(mm)	(Blade thickness x	0.6x3.5
Philips		PH1
(N.m)		0.4
		9~11
		TS-35/ TS-35/15
		YES



	NO
--	----

-UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	20
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	20
UL/CUL AWG	22
UL/CUL AWG	12
UL/CUL AWG	22
UL/CUL AWG	12

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	22~12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	22~12
(Group C)(V)	600
(Group C)(A)	20

CUL

(Group B)(AWG)	22~12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	22~12
(Group C)(V)	600
(Group C)(A)	20

VDE

--	--

(mm ²)	0.14~2.5
(V)	1000
(A)	24

