


# 0227-36XXL

PCB &gt; PCB -

:2026-03-30 :V1

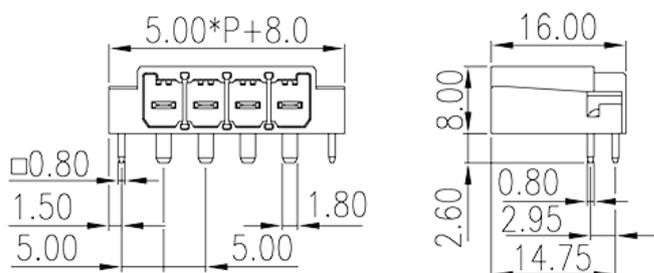

Pitch : 5.00 mm, 300V, 15A

|                |   |
|----------------|---|
|                | PCB Connector – Socket, Reflow soldering  |
|                | PCB Connector – Socket  |
| (mm)           | 5.00  |
|                | Black (default)   |
|                | With release tool   |
|                | Reflow Soldering (Temperature condition according to standard IPC/JEDEC J-STD-020E) |
| (mm)           | 5.00*(P-1)+13.0   |
| (mm)           | 16  |
| (mm)           | 8   |
| (   x   ) (mm) | 0.8x1.8   |
| PCB (mm)       | 1.35~1.45   |
| (   )          | 02P~24P   |
|                | Single level  |
|                | HIGH-TEMPERATURE PLASTICS   |
|                | I   |



|       |                 |
|-------|-----------------|
| UL 94 | V0              |
|       | 500M at DC 500V |
|       | COPPER ALLOY    |
|       | Tin PLATED      |
| MSL   | 2               |

**-IEC**

|             |     |
|-------------|-----|
| (V)         | 630 |
| (A)         | 18  |
| (II/2)(V)   | 630 |
| (III/2)(V)  | 320 |
| (III/3)(V)  | 320 |
| (II/2)(KV)  | 4   |
| (III/2)(KV) | 4   |
| (III/3)(KV) | 4   |

**-UL**

|                     |     |
|---------------------|-----|
| (UL/CUL Group B)(V) | 300 |
| (UL/CUL Group B)(A) | 15  |
| (UL/CUL Group D)(V) | 300 |
| (UL/CUL Group D)(A) | 10  |

**&**

|               |     |
|---------------|-----|
| 가 (YES or NO) | YES |
|               | 120 |
|               | -40 |

**UL**

|              |     |
|--------------|-----|
| (Group B)(V) | 300 |
| (Group B)(A) | 15  |
| (Group D)(V) | 300 |
| (Group D)(A) | 10  |

**CUL**

|              |     |
|--------------|-----|
| (Group B)(V) | 300 |
|--------------|-----|

|              |     |
|--------------|-----|
| (Group B)(A) | 15  |
| (Group D)(V) | 300 |
| (Group D)(A) | 10  |

