



# DKK4N

DIN

&gt;

:2026-02-09

:1.2

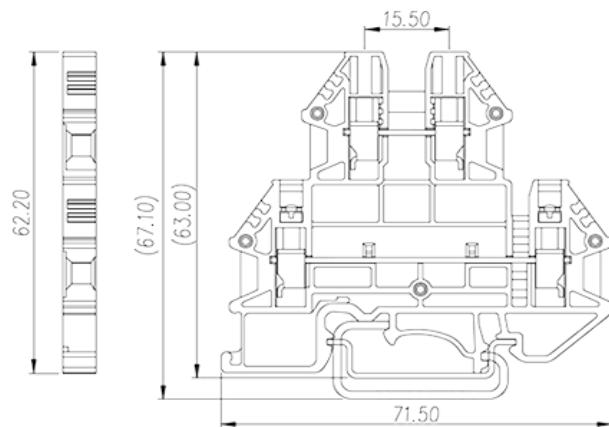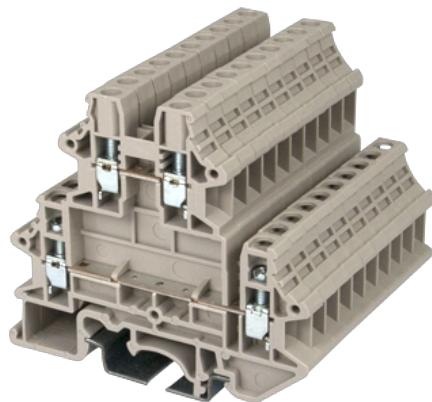

M3, 600V, 30A, Beige (default)

	DIN rail terminal blocks, Bi level feed through terminal blocks
	Bi level feed through terminal blocks
	Beige (default)
	Screw connection
	Rail mounting
(mm)	71.5
(mm)	6.1
(mm)	62.2
( )	1P
	Double level
	4

UL 94	PA I V0 500M at DC 500V
-------	----------------------------------

## -IEC

(V)		800
(A)		32
(III/3)(V)		800
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		6
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		4
(mm <sup>2</sup> ) , ,		0.34
(mm <sup>2</sup> ) , ,		4
(mm <sup>2</sup> ) , ,		0.34
(mm <sup>2</sup> ) , ,		4
2 (mm <sup>2</sup> )		0.34
2 (mm <sup>2</sup> )		2.5
2 (mm <sup>2</sup> )		0.34
2 (mm <sup>2</sup> )		2.5
2 (mm <sup>2</sup> ) , , ,		0.34
2 (mm <sup>2</sup> ) , , ,		1.5
2 (mm <sup>2</sup> ) , , ,		0.5
2 (mm <sup>2</sup> ) , , ,		2.5
		M3
Width)(mm)	(Blade thickness x	0.6x3.5
Philips		PH0
(N.m)		0.5
(N.m)		0.5
(N.m)		0.6
		9~11

	TS-35
	YES
	NO

### -UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	30
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	30
UL/CUL	AWG

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

### UL

(Group B)(AWG)	22~10
(Group B)(V)	600
(Group B)(A)	30
(Group C)(AWG)	22~10
(Group C)(V)	600
(Group C)(A)	30

### VDE

(mm <sup>2</sup> )	0.34~4
(V)	800
(A)	32

