


# DK10N-PE

DIN >

:2026-02-09

:1.2

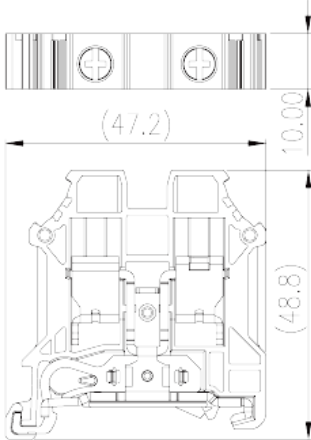

M4, Green-Yellow (default)

	Grounding Terminal Block, Screw Connection
	Grounding terminal blocks
	Green-Yellow (default)
	Screw connection
	Rail mounting
(mm)	47.2
(mm)	10
(mm)	48.8
( )	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

## -IEC

(V)	1000
(III/3)(V)	1000
(III/3)(KV)	8
(mm <sup>2</sup> )	0.5
(mm <sup>2</sup> )	16
(mm <sup>2</sup> )	0.5
(mm <sup>2</sup> )	10
(mm <sup>2</sup> ) , ,	0.5
(mm <sup>2</sup> ) , ,	10
(mm <sup>2</sup> ) , ,	0.5
(mm <sup>2</sup> ) , ,	10
2 (mm <sup>2</sup> )	0.5
2 (mm <sup>2</sup> )	10
2 (mm <sup>2</sup> )	0.5
2 (mm <sup>2</sup> )	6
(mm <sup>2</sup> ) 2 , ,	0.5
(mm <sup>2</sup> ) 2 , ,	6
(mm <sup>2</sup> ) 2 , ,	0.5
(mm <sup>2</sup> ) 2 , ,	6
	M4
Width)(mm) (Blade thickness x	1.0x5.5
Philips	PH2
(N.m)	2.5
	12~14
	TS-35、TS-35/15
	YES
	YES

## -UL

(UL/CUL Group B)(V)	600
(UL/CUL Group C)(V)	600
UL/CUL AWG	20
UL/CUL AWG	6
UL/CUL AWG	20
UL/CUL AWG	6

&amp;

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

## UL

(Group B)(AWG)	20~6
(Group B)(V)	600
(Group C)(AWG)	20~6
(Group C)(V)	600

## CUL

(Group B)(AWG)	20~6
(Group B)(V)	600
(Group C)(AWG)	20~6
(Group C)(V)	600

## VDE

(mm <sup>2</sup> )	0.5~10
(V)	1000

--	--

