


# 0161-13XX

PCB > PCB -

:2026-07-05 :V1



Twin connectors design, the pole number is half of the total connection points. The photo shows a 12 connection product, the pole number is 06.

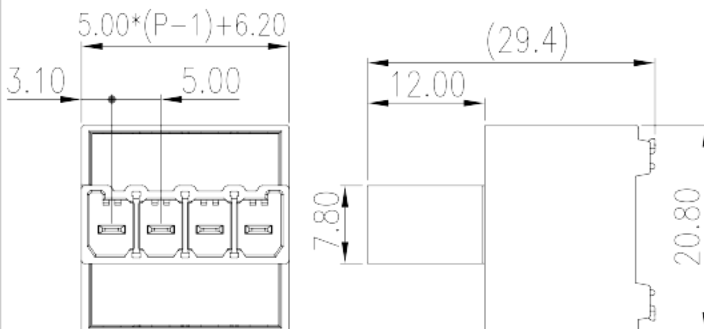

Pitch : 5.00 mm, 300V, 15A

	PCB Connector – Socket, Push-in Design
	PCB Connector – Socket
(mm)	5.00
	Black (default)
	Push-in Design
	Without
(mm)	$5.00 * (P-1) + 6.2$
(mm)	20.8
(mm)	29.4
( )	02P~24P
	Single level

	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

Tin PLATED

**-IEC**

(V)	630
(A)	18
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	25
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	25
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	1.5
	12~13

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	15
UL/CUL AWG	24
UL/CUL AWG	12
UL/CUL AWG	24
UL/CUL AWG	12

&amp;

가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	24~12
(Group B)(V)	300
(Group B)(A)	15
(Group D)(AWG)	24~12
(Group D)(V)	300
(Group D)(A)	15


CUL

(Group B)(AWG)	24~12
(Group B)(V)	300
(Group B)(A)	15
(Group D)(AWG)	24~12
(Group D)(V)	300
(Group D)(A)	15

VDE

(mm <sup>2</sup> )	0.2~2.5
(V)	600
(A)	18

--	--

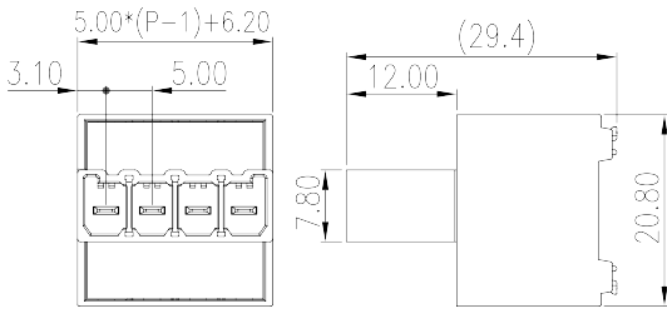

circuit diagram

