


# 0156-1AXX-BK

PCB > PCB -

:2026-03-30 :1.1

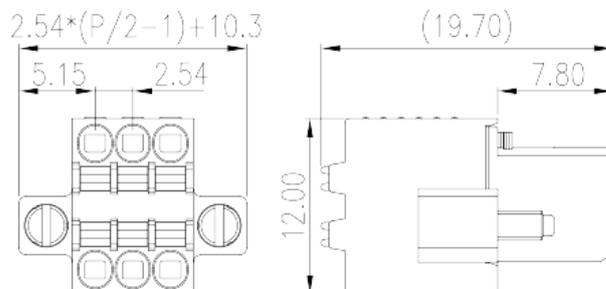

Pitch : 2.54 mm, 150V, 5A

	PCB Connector – Plug, Push-in Design
	PCB Connector – Plug
(mm)	2.54
	Black (default)
	Push in Design
	With screw flange
(mm)	$2.54 * (P/2 - 1) + 10.3$
(mm)	12
(mm)	19.7
( )	04P~44P
	Double level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

Tin PLATED

**-IEC**

(V)	320
(A)	6
(II/2)(V)	320
(III/2)(V)	160
(III/3)(V)	160
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	0.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	0.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	0.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	0.34
(N.m)	0.1
	7~8

**-UL**

(UL/CUL Group B)(V)	150
(UL/CUL Group B)(A)	5
UL/CUL AWG	30
UL/CUL AWG	20
UL/CUL AWG	30
UL/CUL AWG	20

**&**

가 (YES or NO)	YES
	120

-40

### UL

(Group B) (AWG)	30~20
(Group B) (V)	150
(Group B) (A)	5

### CUL

(Group B) (AWG)	30~20
(Group B) (V)	150
(Group B) (A)	5

