


0156-1DXX-BK

PCB > PCB -

:2026-02-09

:1.1

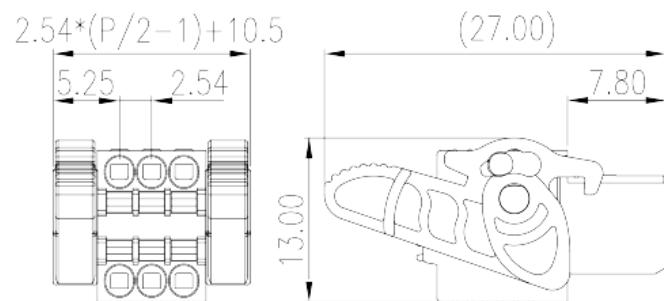

Pitch : 2.54 mm, 150V, 5A

	PCB Connector – Plug, Push-in Design
(mm)	PCB Connector – Plug
(mm)	2.54
(mm)	Black (default)
(mm)	Push in Design
(mm)	With release tool
(mm)	2.54*(P/2-1) + 10.5
(mm)	12.0
(mm)	27.0
()	04P~44P
	Double level

UL 94	PA I V0
	500M at DC 500V COPPER ALLOY

Tin PLATED

-IEC

(V)		320
(A)		6
(II/2)(V)		320
(III/2)(V)		160
(III/3)(V)		160
(II/2)(KV)		2.5
(III/2)(KV)		2.5
(III/3)(KV)		2.5
(mm ²)		0.2
(mm ²)		0.5
(mm ²)		0.2
(mm ²)		0.5
(mm ²) , , ,		0.25
(mm ²) , , ,		0.5
(mm ²) , , ,		0.25
(mm ²) , , ,		0.34
		7~8

-UL

(UL/CUL Group B)(V)		150
(UL/CUL Group B)(A)		5
UL/CUL	AWG	30
UL/CUL	AWG	20
UL/CUL	AWG	30
UL/CUL	AWG	20

&

가	(YES or NO)	YES
		120
		-40

UL

(Group B)(AWG)	30~20
(Group B)(V)	150
(Group B)(A)	5

CUL

(Group B)(AWG)	30~20
(Group B)(V)	150
(Group B)(A)	5

