



# DP2.5N

DIN

>

:2026-07-04

:1.1

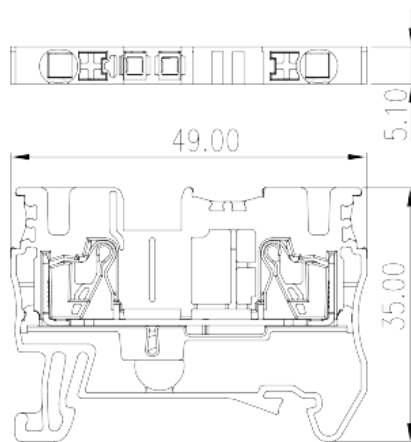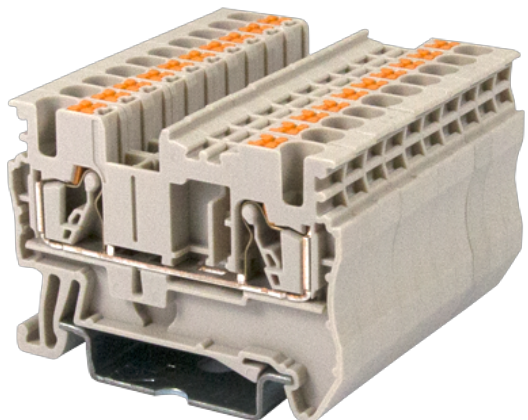

600V, 20A, Beige (default)

	Single level Feed-Through Terminal Block, Push-in Design
	Single level Feed Through Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	49
(mm)	5.1
(mm)	35
( )	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)		800
(A)		24
(III/3)(V)		800
(III/3)(KV)		8
(mm <sup>2</sup> )		0.14
(mm <sup>2</sup> )		4
(mm <sup>2</sup> )		0.14
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> )	,	0.25
(mm <sup>2</sup> )	,	2.5
(mm <sup>2</sup> )	,	0.25
(mm <sup>2</sup> )	,	2.5
<sup>2</sup> (mm <sup>2</sup> )	,	0.5
<sup>2</sup> (mm <sup>2</sup> )	,	0.5
Width)(mm)	(Blade thickness x	0.6x3.5
		10
		TS-35、TS-35/15
		YES
		NO

**-UL**

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		20
(UL/CUL Group D)(V)		26~12
(UL/CUL Group D)(A)		600
(UL/CUL Group E)(V)		5
UL/CUL	AWG	26
UL/CUL	AWG	12



UL/CUL	AWG	26
UL/CUL	AWG	12

&amp;

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

**UL**

(Group B)(AWG)	26~12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	26~12
(Group C)(V)	600
(Group C)(A)	20
(Group D)(AWG)	26~12
(Group D)(V)	600
(Group D)(A)	5

**CUL**

(Group B)(AWG)	26~12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	26~12
(Group C)(V)	600
(Group C)(A)	20
(Group D)(AWG)	26~12
(Group D)(V)	600
(Group D)(A)	5

**VDE**

(mm <sup>2</sup> )	0.14~2.5
(V)	800
(A)	24

