


DP2.5N

DIN

>

:2026-05-14

:1.1

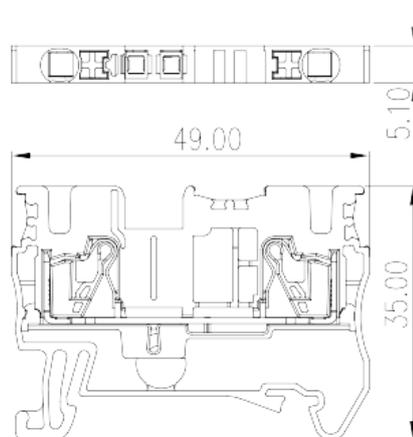

600V, 20A, Beige (default)

	Single level Feed-Through Terminal Block, Push-in Design
	Single level Feed Through Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	49
(mm)	5.1
(mm)	35
()	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)		800
(A)		24
(III/3)(V)		800
(III/3)(KV)		8
(mm ²)		0.14
(mm ²)		4
(mm ²)		0.14
(mm ²)		2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
² (mm ²)	,	0.5
² (mm ²)	,	0.5
Width)(mm)	(Blade thickness x	0.6x3.5
		10
		TS-35、TS-35/15
		YES
		NO

-UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		20
(UL/CUL Group D)(V)		26~12
(UL/CUL Group D)(A)		600
(UL/CUL Group E)(V)		5
UL/CUL	AWG	26
UL/CUL	AWG	12



UL/CUL	AWG	26
UL/CUL	AWG	12

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	26~12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	26~12
(Group C)(V)	600
(Group C)(A)	20
(Group D)(AWG)	26~12
(Group D)(V)	600
(Group D)(A)	5

CUL

(Group B)(AWG)	26~12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	26~12
(Group C)(V)	600
(Group C)(A)	20
(Group D)(AWG)	26~12
(Group D)(V)	600
(Group D)(A)	5

VDE

(mm ²)	0.14~2.5
(V)	800
(A)	24

