



# DP4N

DIN

>

:2026-05-14

:1.1

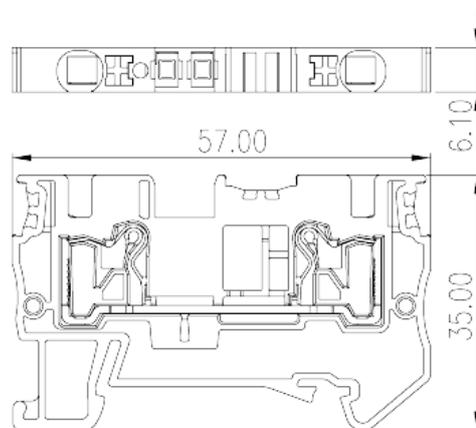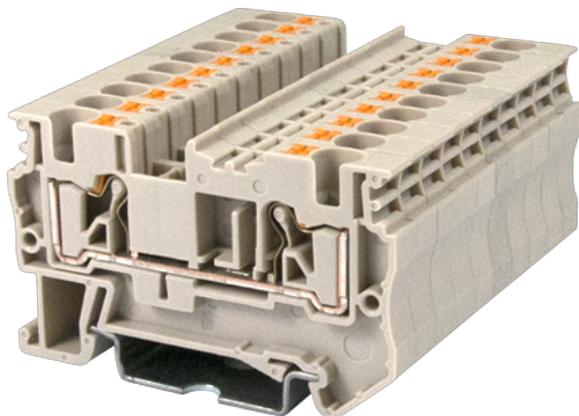

600V, 30A, Beige (default)

	Single level Feed-Through Terminal Block, Push-in Design
	Single level Feed Through Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	57
(mm)	6.1
(mm)	35
( )	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)	800
(A)	32
(III/3)(V)	800
(III/3)(KV)	8
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	6
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	4
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	4
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	4
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	1
Width)(mm) (Blade thickness x	0.8x4.0
	12
	TS-35、TS-35/15
	YES
	NO

**-UL**

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	30
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	30
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	5
UL/CUL AWG	24
UL/CUL AWG	10
UL/CUL AWG	24



UL/CUL	AWG	10
<b>&amp;</b>		
	(YES or NO)	YES
가	(YES or NO)	YES
		120
		-40

**UL**

	(Group B)(AWG)	24~10
	(Group B)(V)	600
	(Group B)(A)	30
	(Group C)(AWG)	24~10
	(Group C)(V)	600
	(Group C)(A)	30
	(Group D)(AWG)	24~10
	(Group D)(V)	600
	(Group D)(A)	5

**CUL**

	(Group B)(AWG)	24~10
	(Group B)(V)	600
	(Group B)(A)	30
	(Group C)(AWG)	24~10
	(Group C)(V)	600
	(Group C)(A)	30
	(Group D)(AWG)	24~10
	(Group D)(V)	600
	(Group D)(A)	5

**VDE**

	(mm <sup>2</sup> )	0.2~4
	(V)	800
	(A)	32

