



DP2.5N-TN

DIN

>

:2026-07-04

:1.1

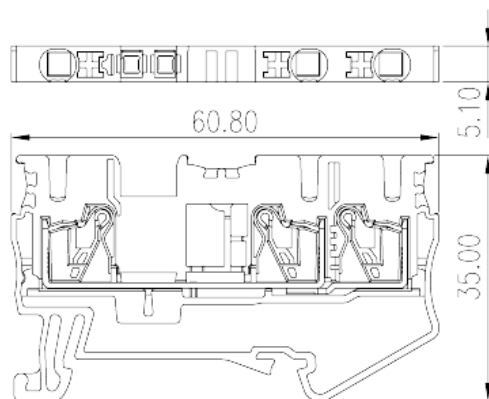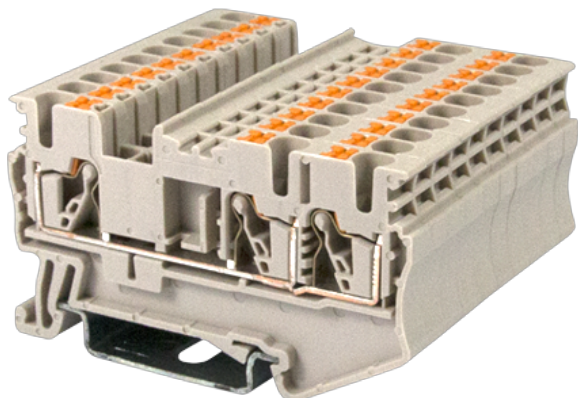

600V, 20A, Beige (default)

	Single level Feed-Through Terminal Block, Push-in Design
	Single level Feed Through Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	60.8
(mm)	5.1
(mm)	35
()	1P
	Single level
	3
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)	800
(A)	24
(III/3)(V)	800
(III/3)(KV)	8
(mm ²)	0.14
(mm ²)	4
(mm ²)	0.14
(mm ²)	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
² (mm ²) , ,	0.5
² (mm ²) , ,	0.5
Width)(mm) (Blade thickness x	0.6x3.5
	10
	TS-35、TS-35/15
	YES
	NO

-UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	20
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	20
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	5
UL/CUL AWG	26
UL/CUL AWG	12
UL/CUL AWG	26

UL/CUL	AWG	12
&		
	(YES or NO)	YES
가	(YES or NO)	YES
		120
		-40

UL

	(Group B)(AWG)	26~12
	(Group B)(V)	600
	(Group B)(A)	20
	(Group C)(AWG)	26~12
	(Group C)(V)	600
	(Group C)(A)	20
	(Group D)(AWG)	26~12
	(Group D)(V)	600
	(Group D)(A)	5

CUL

	(Group B)(AWG)	26~12
	(Group B)(V)	600
	(Group B)(A)	20
	(Group C)(AWG)	26~12
	(Group C)(V)	600
	(Group C)(A)	20
	(Group D)(AWG)	26~12
	(Group D)(V)	600
	(Group D)(A)	5

VDE

	(mm ²)	0.14~2.5
	(V)	800
	(A)	24

