


# WKA50B-XXP

PCB &gt; PCB

:2026-05-14 :V1

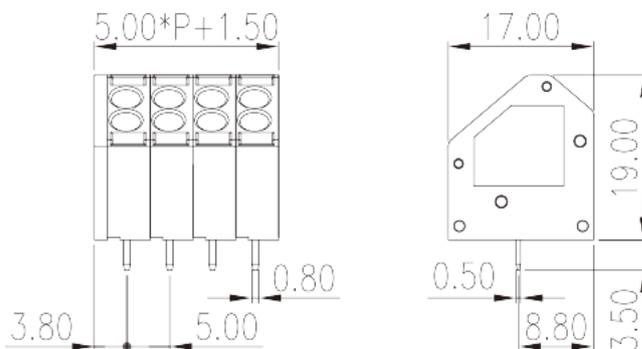

Pitch : 5.00 mm, 300V, 10A

PCB Terminal Blocks, Push-in Design	
PCB Terminal Blocks	
(mm)	5.00
	Grey (default)
	Push in design
	Without
	Wave soldering
(mm)	$5.00 * (P - 1) + 6.5$
(mm)	17
(mm)	19
(    x    ) (mm)	0.5x0.8
PCB      (mm)	1.1~1.2
(    )	02P~12P
	Single level
	PA
	I

UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

### -IEC

(V)	320
(A)	17.5
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	1.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	1
Width)(mm) (Blade thickness x	0.4x2.5
	9~10

### -UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	10
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	24
UL/CUL AWG	16

UL/CUL	AWG	24
UL/CUL	AWG	16

&amp;

가	(YES or NO)	YES
		120
		-40

**UL**

(Group B)(AWG)	24~16
(Group B)(V)	300
(Group B)(A)	10
(Group D)(AWG)	24~16
(Group D)(V)	300
(Group D)(A)	10

**CUL**

(Group B)(AWG)	24~16
(Group B)(V)	300
(Group B)(A)	10
(Group D)(AWG)	24~16
(Group D)(V)	300
(Group D)(A)	10

