


## WKA50B-XXP

PCB > PCB :2025-11-05 :V1



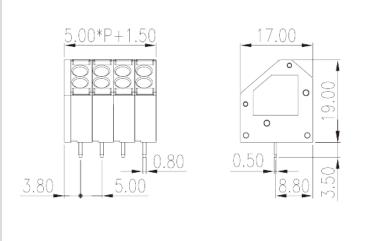

Pitch: 5.00 mm, 300V, 10A

	PCB Terminal Blocks, Push-in Design
	PCB Terminal Blocks
(mm)	5.00
	Grey (default)
	Push in design
	Without
	Wave soldering
(mm)	5.00*(P-1)+6.5
(mm)	17
(mm)	19
( x ) (mm)	0.5x0.8
PCB (mm)	1.1~1.2
( )	02P~12P
	Single level

PA
I

UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED
-IEC	
(V)	320
(A)	17.5
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm²)	0.2
(mm²)	1.5
(mm²)	0.2
(mm²)	1.5
(mm <sup>2</sup> )	0.25
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> )	0.25
(mm <sup>2</sup> )	1
(Blade thickness x Width) (mm)	0.4x2.5
	9~10
-UL	
(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	10
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	24
UL/CUL AWG	16

UL/CUL	AWG	24
UL/CUL	AWG	16
&		

가	(YES or NO)	YES
		120
		-40

## UL

(Group B)(AWG)	24~16
(Group B)(V)	300
(Group B)(A)	10
(Group D)(AWG)	24~16
(Group D)(V)	300
(Group D)(A)	10

## CUL

(Group B)(AWG)	24~16
(Group B)(V)	300
(Group B)(A)	10
(Group D)(AWG)	24~16
(Group D)(V)	300
(Group D)(A)	10

