




DKK2.5N-TG

DIN

>

:2026-03-29

:1.2

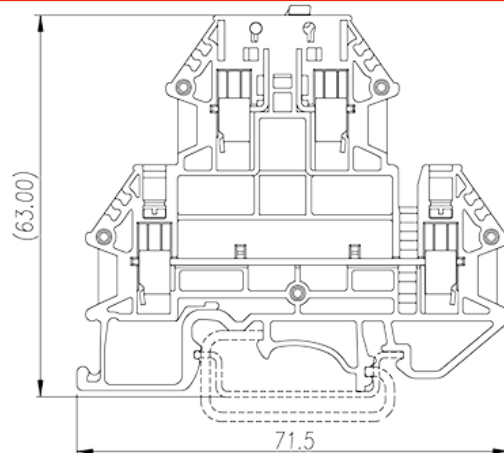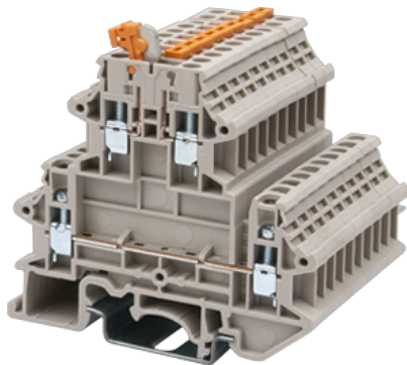

M2.5, 300V, 20A, Beige (default)

	DIN rail terminal blocks, Disconnect terminal blocks
	Disconnect terminal blocks
	Beige (default)
	Screw connection
	Rail mounting
(mm)	71.5
(mm)	5.1
(mm)	63.9
()	1P
	Double level
	4
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)		400
(A)		21
(III/3)(V)		400
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm ²)		0.34
(mm ²)		4
(mm ²)		0.34
(mm ²)		2.5
(mm ²)	,	0.34
(mm ²)	,	2.5
(mm ²)	,	0.34
(mm ²)	,	2.5
2	(mm ²)	0.34
2	(mm ²)	1.5
2	(mm ²)	0.34
2	(mm ²)	1.5
(mm ²) 2	,	0.34
(mm ²) 2	,	1.5
2	(mm ²)	0.5
2	(mm ²)	1
		M2.5
Width)(mm)	(Blade thickness x	0.4x2.5
Philips		PH0
(N.m)		0.4
		9~11
		TS-35
		YES



	NO
--	----

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	20
UL/CUL AWG	22
UL/CUL AWG	12
UL/CUL AWG	22
UL/CUL AWG	12

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	22~12
(Group B)(V)	300
(Group B)(A)	20
(Group D)(AWG)	22~12
(Group D)(V)	300
(Group D)(A)	20

CUL

(Group B)(AWG)	22~12
(Group B)(V)	300
(Group B)(A)	20
(Group D)(AWG)	22~12
(Group D)(V)	300
(Group D)(A)	20

VDE

(mm ²)	0.34~2.5
(V)	400

(A)

21

