



# DKK4N-TG

DIN

>

:2026-05-14

:1.2

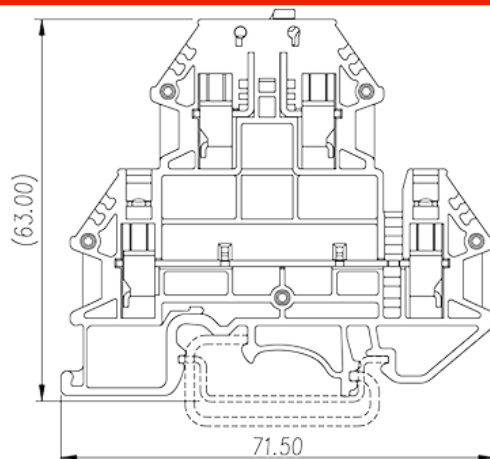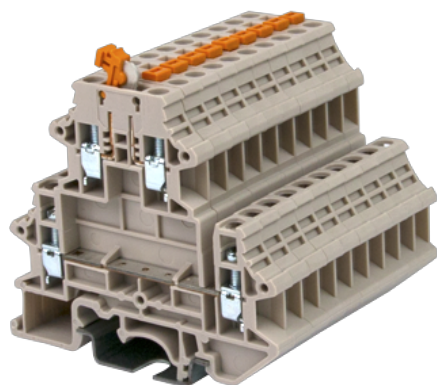

M3, 300V, 30A, Beige (default)

	DIN rail terminal blocks, Disconnect terminal blocks
	Disconnect terminal blocks
	Beige (default)
	Screw connection
	Rail mounting
(mm)	71.5
(mm)	6.1
(mm)	63.9
( )	1P
	Double level
	4
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)		400
(A)		32
(III/3)(V)		400
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		6
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		4
(mm <sup>2</sup> )	,	0.34
(mm <sup>2</sup> )	,	4
(mm <sup>2</sup> )	,	0.34
(mm <sup>2</sup> )	,	4
2	(mm <sup>2</sup> )	0.34
2	(mm <sup>2</sup> )	2.5
2	(mm <sup>2</sup> )	0.34
2	(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) 2	,	0.5
(mm <sup>2</sup> ) 2	,	1.5
2	(mm <sup>2</sup> )	0.5
2	(mm <sup>2</sup> )	1.5
		M3
Width)(mm)	(Blade thickness x	0.6x3.5
Philips		PH1
(N.m)		0.6
		9~11
		TS-35
		YES

	NO
--	----

**-UL**

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		30
UL/CUL	AWG	22
UL/CUL	AWG	10
UL/CUL	AWG	22
UL/CUL	AWG	10

**&**

(YES or NO)		YES
가 (YES or NO)		YES
		120
		-40

**VDE**

(mm <sup>2</sup> )		0.34~4
(V)		400
(A)		32

**circuit diagram**

