
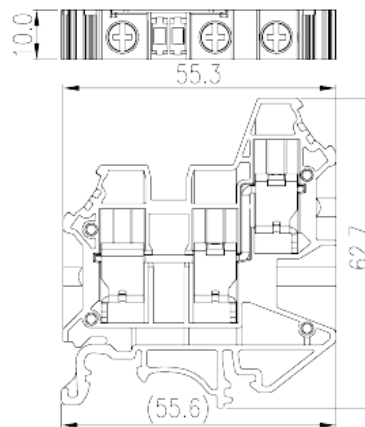


DK10N-TN

DIN

>

:2026-02-09

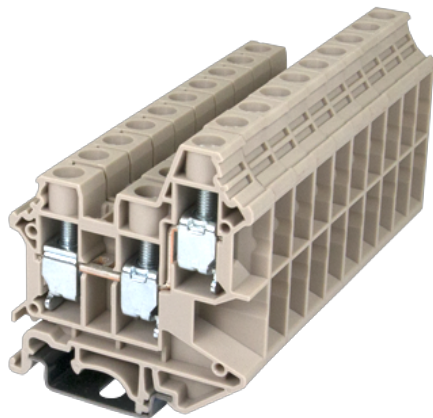

M4, 600V, 60A, Beige (default)

	Single level Feed-Through Terminal Block, Screw Connection
	Single level Feed Through Terminal Block
(mm)	10
	Beige (default)
	Screw Connection
	Rail mounting
(mm)	55.6
(mm)	10
(mm)	62.7
()	1P
	Single level
	3
	PA
	I
UL 94	V0



500M at DC 500V

-IEC

(V)	1000
(A)	57
(III/3)(V)	1000
(III/3)(KV)	8
(mm ²)	0.5
(mm ²)	16
(mm ²)	0.5
(mm ²)	10
(mm ²) , ,	0.5
(mm ²) , ,	10
(mm ²) , ,	0.5
(mm ²) , ,	10
2 (mm ²)	0.5
2 (mm ²)	6
2 (mm ²)	0.5
2 (mm ²)	6
(mm ²) 2 , ,	0.5
(mm ²) 2 , ,	6
2 (mm ²) , ,	0.5
2 (mm ²) , ,	6
	M4
Width)(mm) (Blade thickness x	1.0x5.5
Philips	PH1
(N.m)	1.2
(N.m)	1.3
	12~14
	TS-35、TS-35/15



	YES
	NO

-UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	60
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	60
UL/CUL AWG	20
UL/CUL AWG	6
UL/CUL AWG	20
UL/CUL AWG	6

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	20~6
(Group B)(V)	600
(Group B)(A)	60
(Group C)(AWG)	20~6
(Group C)(V)	600
(Group C)(A)	60

CUL

(Group B)(AWG)	20~6
(Group B)(V)	600
(Group B)(A)	60
(Group C)(AWG)	20~6
(Group C)(V)	600
(Group C)(A)	60

VDE

(mm ²)	0.5~10
(V)	1000
(A)	57

