



## DP6N-TR-PE

DIN > :2025-11-05

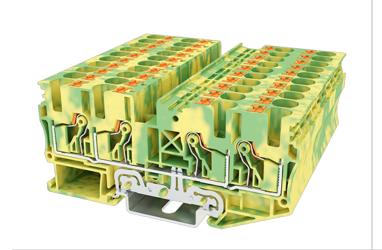



600V, Green-Yellow (default)

	Grounding Terminal Block, Push-in Design
	Grounding Terminal Block
	Green-Yellow (default)
	Push-in Design
	Rail mounting
(mm)	91.4
(mm)	8
(mm)	42
( )	1P
	Single level
	4

	PA
	I
UL 94	VO
	500M at DC 500V

## -IEC

(V)		1000
(III/3)(V)		1000
(III/3)(KV)		8
(mm ² )		0.5
(mm <sup>2</sup> )		10
(mm <sup>2</sup> )		0.5
(mm <sup>2</sup> )		6
(mm <sup>2</sup> )	,	0.5
(mm <sup>2</sup> )	,	6
(mm <sup>2</sup> )	,	0.5
(mm²)	,	6
2 (mi	m²)	0.5
2 (mi	m²)	1.5
(Blade thickness x Width)(mm)		0.8x4.0
		12
		TS-35、TS-35/15
		YES
		YES
-UL		
(UL/CUL Group B)(V)		600
(UL/CUL Group C)(V)		600
UL/CUL	AWG	20
UL/CUL	AWG	8
UL/CUL	AWG	20
UL/CUL	AWG	8
&		
(YES or NO)		V/=0
(YES or NO	)	YES

120
-40

## UL

(Group B)(AWG)	20~8
(Group B)(V)	600
(Group C)(AWG)	20~8
(Group C)(V)	600

## CUL

(Group B)(AWG)	20~8
(Group B)(V)	600
(Group C)(AWG)	20~8
(Group C)(V)	600

