
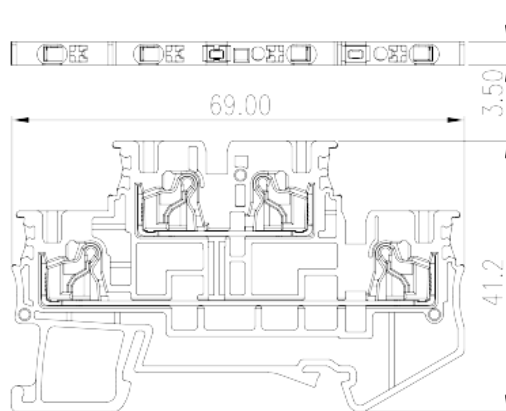


# DPP1.5N

DIN

>

:2026-07-04

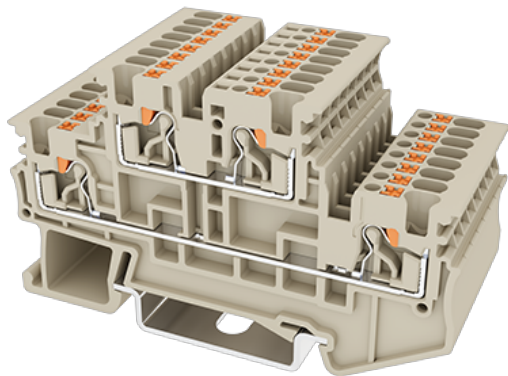

300V, 15A, Beige (default)

	Bi-level Feed-Through Terminal Block, Push-in Design
	Bi level Feed Through Terminal Blocks
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	69
(mm)	3.5
(mm)	41.2
( )	1P
	Double level
	4
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)	500
(A)	17.5
(III/3)(V)	500
(III/3)(KV)	6
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	1.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	0.75
Width)(mm) (Blade thickness x	0.4x2.5
	8~9
	TS-35
	YES
	NO

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	15
UL/CUL AWG	26
UL/CUL AWG	14
UL/CUL AWG	26
UL/CUL AWG	14

**&**

(YES or NO)	YES
가 (YES or NO)	YES

	120
	-40

## UL

(Group B)(AWG)	26~14
(Group B)(V)	300
(Group B)(A)	15
(Group C)(AWG)	26~14
(Group C)(V)	300
(Group C)(A)	15

## CUL

(Group B)(AWG)	26~14
(Group B)(V)	300
(Group B)(A)	15
(Group C)(AWG)	26~14
(Group C)(V)	300
(Group C)(A)	15

## VDE

(mm <sup>2</sup> )	0.14~1.5
(V)	500
(A)	17.5

