
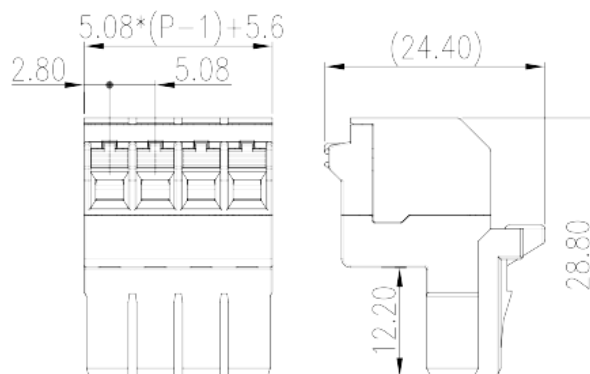


# 0150-21XX

PCB > PCB -

:2026-07-05

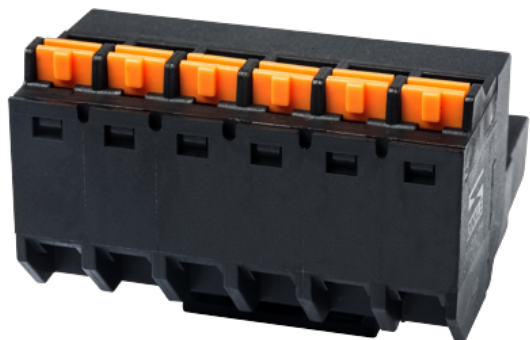

Pitch : 5.08 mm, 300V, 16A

	PCB Connector – Plug, Push-in Design
	PCB Connector – Plug
(mm)	5.08
	Black (default)
	Push in Design
	With lock flange
(mm)	$5.08 \times (P-1) + 5.6$
(mm)	24.4
(mm)	28.8
( )	02P~24P
	Single level
	PBT
	a
UL 94	V0
	1000M at DC 500V
	COPPER ALLOY

Tin PLATED

**-IEC**

(V)	630
(A)	20
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	1.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	1.5
	11~12

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	16
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	24
UL/CUL AWG	12
UL/CUL AWG	24
UL/CUL AWG	12

**&**

가 (YES or NO)	YES
---------------	-----


	120
	-40

## UL

(Group B)(AWG)	24~12
(Group B)(V)	300
(Group B)(A)	16
(Group D)(AWG)	24~12
(Group D)(V)	300
(Group D)(A)	10

## CUL

(Group B)(AWG)	24~12
(Group B)(V)	300
(Group B)(A)	16
(Group D)(AWG)	24~12
(Group D)(V)	300
(Group D)(A)	10

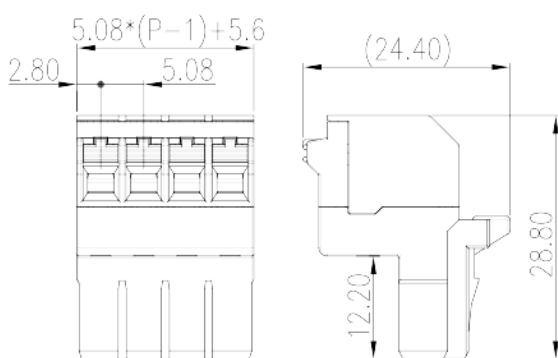



Delight Through Connections