


# 0184-11XX

PCB &gt; PCB -

:2026-02-10

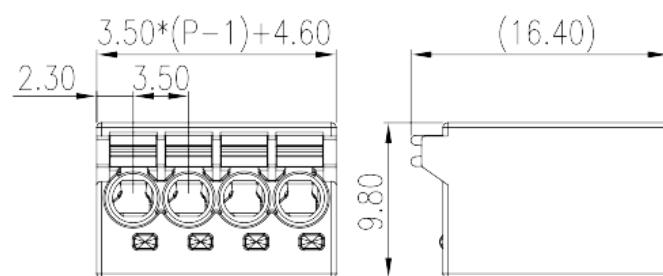

Pitch : 3.50 mm, 150V, 6A

	PCB Connector-Plug, Push-in Design
	PCB Connector – Plug
(mm)	3.5
	Black (default)
	Push in Design
	PCB Connection
(mm)	3.50*(P-1)+4.60
(mm)	9.8
(mm)	16.4
( )	02P~24P
	Single level

	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

Tin PLATED

## -IEC

(V)	320
(A)	7
(II/2)(V)	320
(III/2)(V)	125
(III/3)(V)	125
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> ) , , ,	0.25
(mm <sup>2</sup> ) , , ,	1
(mm <sup>2</sup> ) , , ,	0.25
(mm <sup>2</sup> ) , , ,	0.75
	8~9

## -UL

(UL/CUL Group B)(V)	150
(UL/CUL Group B)(A)	6
UL/CUL AWG	24
UL/CUL AWG	16
UL/CUL AWG	24
UL/CUL AWG	16

&amp;

↗	(YES or NO)	YES
		120
		-40

