


0184-51XX

PCB > PCB -

:2026-03-30

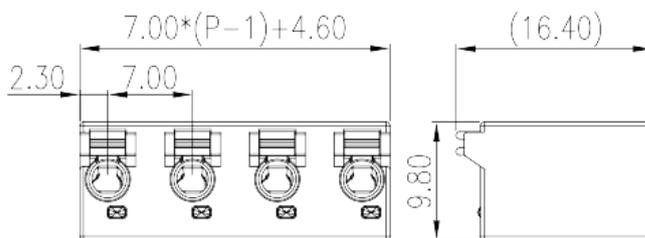

Pitch : 7.00 mm, 300V, 6A

| | |
|-------|--------------------------------------|
| | PCB Connector – Plug, Push-in Design |
| | PCB Connector – Plug |
| (mm) | 7.00 |
| | Black (default) |
| | Push in Design |
| | PCB Connection |
| (mm) | $7.00 * (P-1) + 4.6$ |
| (mm) | 9.8 |
| (mm) | 16.4 |
| () | 02P~12P |
| | Single level |
| | PA |
| | I |
| UL 94 | V0 |
| | 500M at DC 500V |
| | COPPER ALLOY |

Tin PLATED

-IEC

| | |
|------------------------|------|
| (V) | 630 |
| (A) | 7 |
| (II/2)(V) | 630 |
| (III/2)(V) | 630 |
| (III/3)(V) | 400 |
| (II/2)(KV) | 6 |
| (III/2)(KV) | 6 |
| (III/3)(KV) | 6 |
| (mm ²) | 0.2 |
| (mm ²) | 1.5 |
| (mm ²) | 0.2 |
| (mm ²) | 1.5 |
| (mm ²) , , | 0.25 |
| (mm ²) , , | 1 |
| (mm ²) , , | 0.25 |
| (mm ²) , , | 0.75 |
| | 8~9 |

-UL

| | |
|---------------------|-----|
| (UL/CUL Group B)(V) | 300 |
| (UL/CUL Group B)(A) | 6 |
| (UL/CUL Group D)(V) | 300 |
| (UL/CUL Group D)(A) | 6 |
| UL/CUL AWG | 24 |
| UL/CUL AWG | 16 |
| UL/CUL AWG | 24 |
| UL/CUL AWG | 16 |

&

| | |
|---------------|-----|
| 가 (YES or NO) | YES |
|---------------|-----|

| | |
|--|-----|
| | 120 |
| | -40 |

