


0184-84XX

PCB > PCB -

:2026-03-30

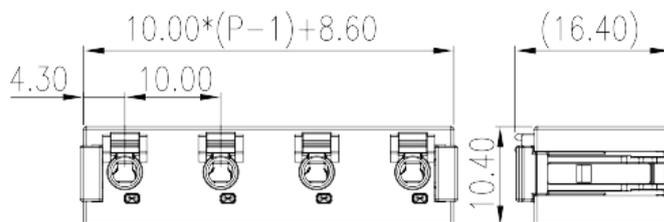

Pitch : 10.00 mm, 300V, 6A

	PCB Connector – Plug, Push-in Design
	PCB Connector – Plug
(mm)	10.00
	Black (default)
	Push in Design
	PCB Connection
(mm)	$10.00 * (P-1) + 8.6$
(mm)	10.4
(mm)	16.4
()	02P~09P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

Tin PLATED

-IEC

(V)	800
(A)	7
(II/2)(V)	800
(III/2)(V)	800
(III/3)(V)	500
(II/2)(KV)	8
(III/2)(KV)	8
(III/3)(KV)	8
(mm ²)	0.2
(mm ²)	1.5
(mm ²)	0.2
(mm ²)	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1
(mm ²) , ,	0.25
(mm ²) , ,	0.75
	8~9

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	6
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	6
UL/CUL AWG	24
UL/CUL AWG	16
UL/CUL AWG	24
UL/CUL AWG	16

&

가 (YES or NO)	YES
---------------	-----

	120
	-40

