
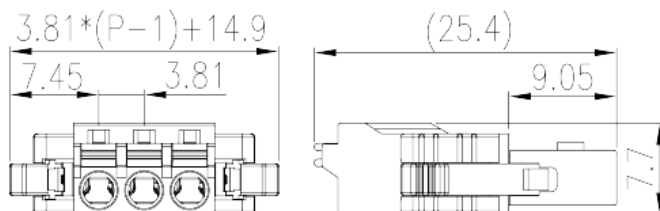


# 0221-44XX

PCB > PCB -

:2026-07-05

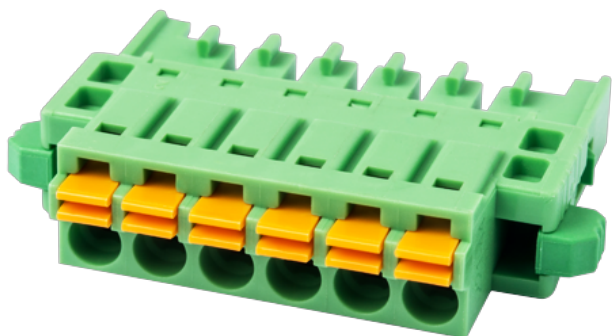

Pitch : 3.81 mm, 300V, 8A

	PCB Connector – Plug, Push-in Design
	PCB Connector – Plug
(mm)	3.81
	Green (default)
	Push-in Design
	With lock flange
(mm)	$3.81 * (P - 1) + 14.9$
(mm)	7.7
(mm)	25.4
( )	02P~24P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

Tin PLATED

**-IEC**

(V)	320
(A)	8
(II/2)(V)	320
(III/2)(V)	160
(III/3)(V)	160
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	1
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	0.75
Width)(mm) (Blade thickness x	0.4x2.5
	8~10

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	8
UL/CUL AWG	24
UL/CUL AWG	16
UL/CUL AWG	24
UL/CUL AWG	16

**&**

가 (YES or NO)	YES
---------------	-----

	120
	-40

**UL**

(Group B)(AWG)	24~16
(Group B)(V)	300
(Group B)(A)	8

**CUL**

(Group B)(AWG)	24~16
(Group B)(V)	300
(Group B)(A)	8

