


# 0150-40XX

PCB > PCB -

:2026-07-05

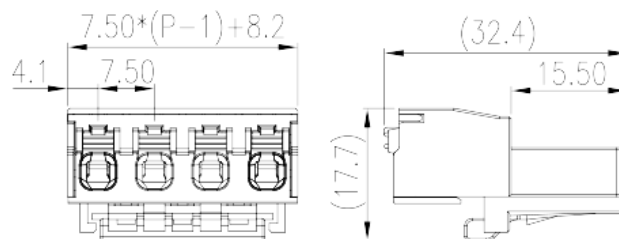

Pitch : 7.50 mm, 600V, 15A

	PCB Connector – Plug
	Refer to drawing
(mm)	7.50
	Black (default)
	Push in Design
	With lock flange
(mm)	$7.50 * (P - 1) + 8.20$
(mm)	32.4
(mm)	17.7
( )	02P~12P
	Single level

	PBT
	IIIa
UL 94	V0
	1000M at DC 500V
	HIGH PERFORMANCE COPPER ALLOY

	Au PLATED
<b>-IEC</b>	
(V)	630
(A)	18
(II/2)(V)	1000
(III/2)(V)	1000
(III/3)(V)	630
(II/2)(KV)	8
(III/2)(KV)	8
(III/3)(KV)	8
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) <sup>2</sup> , ,	0.5
(mm <sup>2</sup> ) <sup>2</sup> , ,	1.5
(mm <sup>2</sup> ) <sup>2</sup> , ,	0.5
(mm <sup>2</sup> ) <sup>2</sup> , ,	1
	12~13
<b>-UL</b>	
(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	15
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	15
(UL/CUL Group D)(V)	600

(UL/CUL Group D)(A)		5
UL/CUL	AWG	20
UL/CUL	AWG	12
UL/CUL	AWG	20
UL/CUL	AWG	12

&

(YES or NO)		YES
가	(YES or NO)	YES
		120
		-40

