


0164-01XX(T)

PCB > PCB -

:2026-07-05

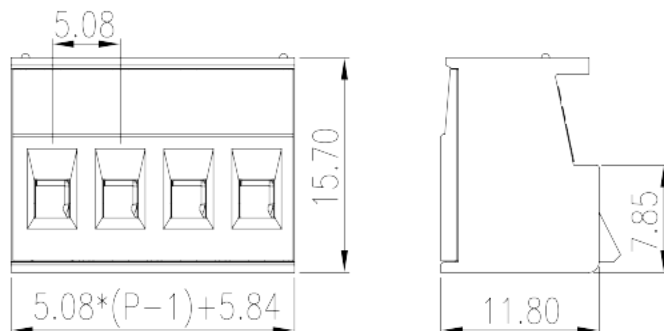

Pitch : 5.08 mm, 300V, 10A(sol)/15A(str)

	PCB Connector - Plug, Screw Connection
	PCB Connector - Plug
(mm)	5.08
	Black (default)
	Screw Connection
	With lock flange
(mm)	$5.08*(P-1)+5.84$
(mm)	13.4
(mm)	15.7
()	02P~24P

	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	320
(A)	15
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	2.5
(mm ²)	0.2
(mm ²)	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
2 (mm ²)	0.2
2 (mm ²)	1
2 (mm ²)	0.2
2 (mm ²)	1
(mm ²) 2 , ,	0.25
(mm ²) 2 , ,	1
2 (mm ²) , ,	0.5
2 (mm ²) , ,	1
	M2.5
Philips	0.6x3.5
(N.m)	0.5
(N.m)	0.6
	6~7

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		10A(sol)/15A(str)
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	26
UL/CUL	AWG	12(sol) / 16(str)
UL/CUL	AWG	26
UL/CUL	AWG	12(sol) / 16(str)

&

가	(YES or NO)	YES
		120
		-40

UL

(Group B)(AWG)		26~12(sol) / 26~16(str)
(Group B)(V)		300
(Group B)(A)		10A(sol)/15A(str)
(Group D)(AWG)		26~12
(Group D)(V)		300
(Group D)(A)		10

CUL

(Group B)(AWG)		26~12(sol) / 26~16(str)
(Group B)(V)		300
(Group B)(A)		10A(sol)/15A(str)
(Group D)(AWG)		26~12
(Group D)(V)		300
(Group D)(A)		10

--	--	--

