


0191-06XX

PCB > PCB -

:2026-03-30

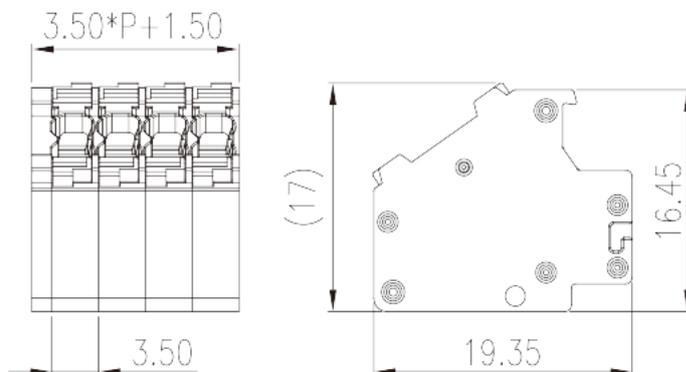

Pitch : 3.50mm, 300V, 8A

	PCB Connector – Plug, Push-in Design
	PCB Connector – Plug
(mm)	3.50
	Black (default)
	Push in Design
	Without
(mm)	3.50*P+1.5
(mm)	19.35
(mm)	17
()	02P~20P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

Tin PLATED

-IEC

(V)	320
(A)	9
(II/2)(V)	400
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	1.5
(mm ²)	0.2
(mm ²)	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1
(mm ²) , ,	0.25
(mm ²) , ,	0.75
	8~9

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	8
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	8
UL/CUL AWG	24
UL/CUL AWG	16
UL/CUL AWG	24
UL/CUL AWG	16

&

가 (YES or NO)	YES
---------------	-----


	120
	-40

UL

(Group B)(AWG)	24~16
(Group B)(V)	300
(Group B)(A)	8
(Group D)(AWG)	24~16
(Group D)(V)	300
(Group D)(A)	8

CUL

(Group B)(AWG)	24~16
(Group B)(V)	300
(Group B)(A)	8
(Group D)(AWG)	24~16
(Group D)(V)	300
(Group D)(A)	8

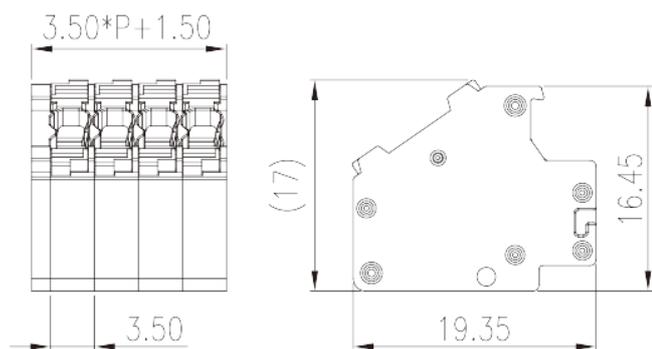



Delight Through Connections