
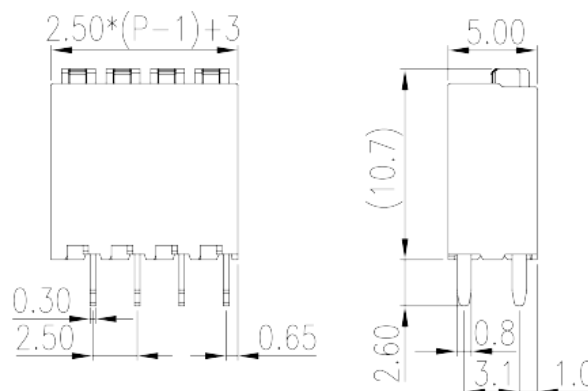


# 0188-02XXL

PCB > PCB

:2026-03-30



Pitch : 2.50mm, 150V, 5A

		PCB Terminal Blocks, Push-in Design
		PCB Terminal Blocks
(mm)		2.50
		Black (default)
		Push in Design
		Without
		Reflow Soldering ( Temperature condition according to standard IPC/JEDEC J-STD-020E)
(mm)		$2.50 \times (P-1) + 3.0$
(mm)		5
(mm)		10.7
(    x    ) (mm)		0.3x0.8
PCB        (mm)		1.2
(    )		02P~20P
		Single level
		HIGH-TEMPERATURE PLASTICS



	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED
MSL	2

**-IEC**

(V)	160
(A)	6
(II/2)(V)	400
(III/2)(V)	160
(III/3)(V)	160
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	0.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	0.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	0.5
	7~8

**-UL**

(UL/CUL Group B)(V)	150
(UL/CUL Group B)(A)	5
UL/CUL AWG	26
UL/CUL AWG	18
UL/CUL AWG	26
UL/CUL AWG	18

**&**

가 (YES or NO)	YES
---------------	-----

	120
	-40

**UL**

(Group B)(AWG)	26~18
(Group B)(V)	150
(Group B)(A)	5

**CUL**

(Group B)(AWG)	26~18
(Group B)(V)	150
(Group B)(A)	5

