
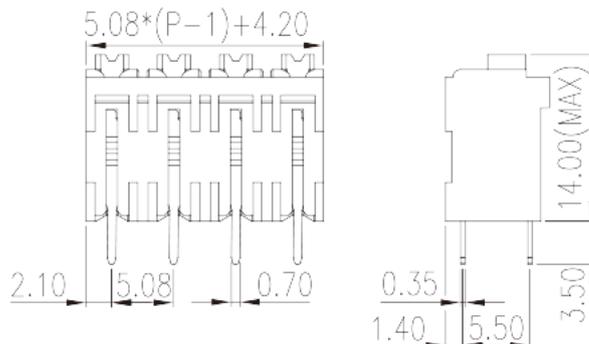


0138-60XX

PCB > PCB

:2026-05-14

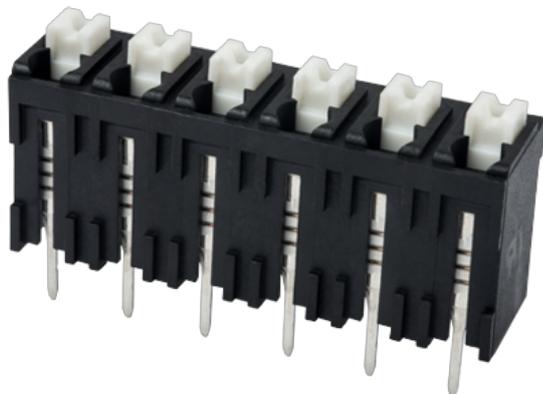

Pitch : 5.08 mm, 300V, 12A

PCB Terminal Blocks, Push-in Design	
PCB Terminal Blocks	
(mm)	5.08
	Black (default)
	Push in Design
	Without
	Wave Soldering
(mm)	$5.08 \times (P-1) + 4.2$
(mm)	8.5
(mm)	14
(x) (mm)	0.35x0.7
PCB (mm)	1.0~1.1
()	02P~18P
	Single level
	1
	PBT



	IIIa
UL 94	V0
	1000M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	320
(A)	17.5
(II/2)(V)	500
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.14
(mm ²)	1.5
(mm ²)	0.14
(mm ²)	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1.5
Width)(mm) (Blade thickness x	0.4x2.5
	8~9

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	12
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	12
UL/CUL AWG	28



UL/CUL	AWG	14
UL/CUL	AWG	28
UL/CUL	AWG	14

&

	(YES or NO)	YES
가	(YES or NO)	YES
		120
		-40

UL

	(Group B)(AWG)	28~14
	(Group B)(V)	300
	(Group B)(A)	12
	(Group D)(AWG)	28~14
	(Group D)(V)	300
	(Group D)(A)	12

CUL

	(Group B)(AWG)	28~14
	(Group B)(V)	300
	(Group B)(A)	12
	(Group D)(AWG)	28~14
	(Group D)(V)	300
	(Group D)(A)	12

--	--	--

