
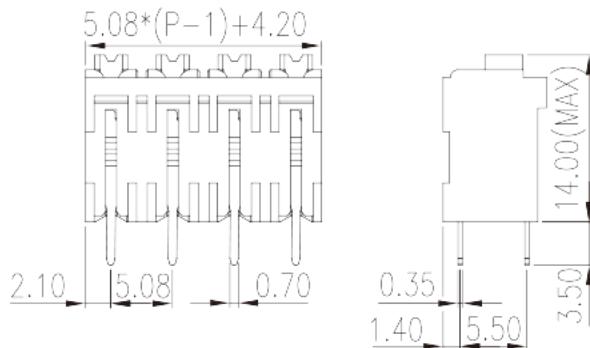


0138-60XXL

PCB > PCB

:2026-02-10

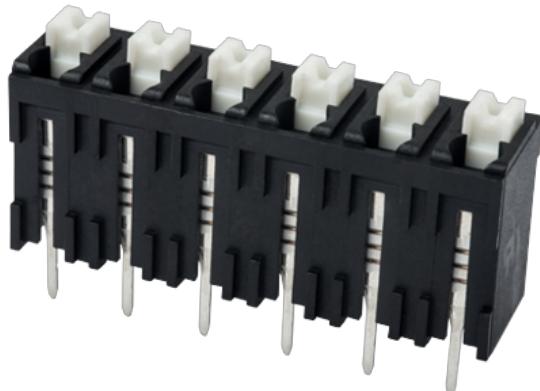

Pitch : 5.08 mm, 300V, 12A

	PCB Terminal Blocks, Push-in Design
	PCB Terminal Blocks
(mm)	5.08
	Black (default)
	Push in Design
	Without
	Reflow Soldering (Temperature condition according to standard IPC/JEDEC J-STD-020E)
(mm)	5.08*(P-1)+4.2
(mm)	8.5
(mm)	14
(x) (mm)	0.35x0.7
PCB (mm)	1.0~1.1
()	02P~24P
	Single level
	1

	HIGH-TEMPERATURE PLASTICS
UL 94	IIIa
	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED
MSL	1

-IEC

(V)	320
(A)	17.5
(II/2)(V)	500
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.14
(mm ²)	1.5
(mm ²)	0.14
(mm ²)	1.5
(mm ²), , ,	0.25
(mm ²), , ,	1.5
(mm ²), , ,	0.25
(mm ²), , ,	1.5
Width)(mm)	(Blade thickness x 0.4x2.5
	8~9

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	12
(UL/CUL Group D)(V)	300

(UL/CUL Group D)(A)		12
UL/CUL	AWG	28
UL/CUL	AWG	14
UL/CUL	AWG	28
UL/CUL	AWG	14

&

가	(YES or NO)	YES
		120
		-40

UL

(Group B)(AWG)	28~14
(Group B)(V)	300
(Group B)(A)	12
(Group D)(AWG)	28~14
(Group D)(V)	300
(Group D)(A)	12

CUL

(Group B)(AWG)	28~14
(Group B)(V)	300
(Group B)(A)	12
(Group D)(AWG)	28~14
(Group D)(V)	300
(Group D)(A)	12



Delight Through Connections

