


0150-46XX

PCB > PCB -

:2026-03-30

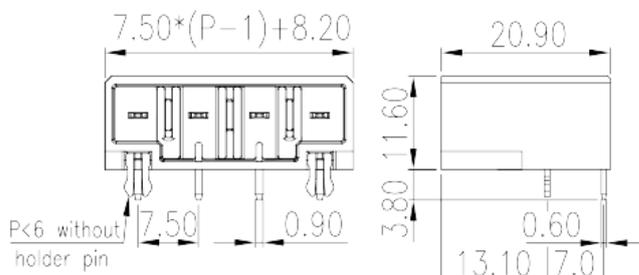

Pitch : 7.50 mm, 300V, 15A

	PCB Connector – Socket, Wave soldering
	PCB Connector – Socket
(mm)	7.50
	Black (default)
	With lock flange
	Wave soldering
(mm)	$7.50 * (P-1) + 8.2$
(mm)	20.9
(mm)	11.6
(x) (mm)	0.6x0.9
PCB (mm)	1.2
()	02P~12P
	Single level
	PBT
	IIIa
UL 94	V0



	1000M at DC 500V
	COPPER ALLOY
	Au PLATED

-IEC

(V)	630
(A)	18
(II/2)(V)	630
(III/2)(V)	630
(III/3)(V)	400
(II/2)(KV)	6
(III/2)(KV)	6
(III/3)(KV)	6

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	15
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	5

&

가 (YES or NO)	YES
	120
	-40

--	--

