


# 0183-11XXTXX

PCB &gt; PCB -

:2026-03-30

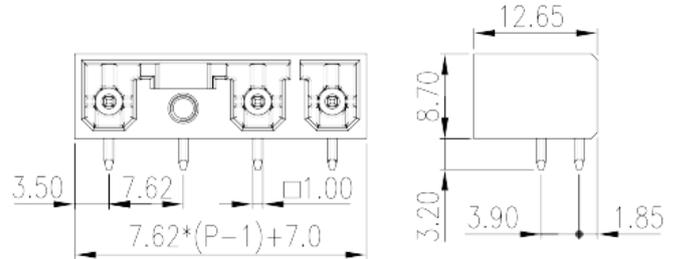

Pitch : 7.62mm, 300V, 25A

	PCB Connector – Socket, Wave soldering
	PCB Connector – Socket
(mm)	7.62
	Black (default)
	With lock flange
	Wave soldering
(mm)	$7.62 * (P-1) + 7.0$
(mm)	12.65
(mm)	8.7
(    x    ) (mm)	1x1
PCB (mm)	1.3(03~09P); 1.6(10~12P)
(    )	03P~12P
	Single level
	PBT
	IIIa
UL 94	V0



	1000M at DC 500V
	COPPER ALLOY
	Tin PLATED

**-IEC**

(V)	630
(A)	32
(II/2)(V)	630
(III/2)(V)	500
(III/3)(V)	400
(II/2)(KV)	6
(III/2)(KV)	6
(III/3)(KV)	6
(N.m)	0.4

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	25
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	25
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	5

**&**

가 (YES or NO)	YES
	120
	-40

**UL**

(Group B)(V)	300
(Group B)(A)	25
(Group C)(V)	300
(Group C)(A)	25
(Group D)(V)	600
(Group D)(A)	5

# CUL

(Group B)(V)	300
(Group B)(A)	25
(Group C)(V)	300
(Group C)(A)	25
(Group D)(V)	600
(Group D)(A)	5

