


# 0191-16XXTH

PCB > PCB -

:2026-07-05

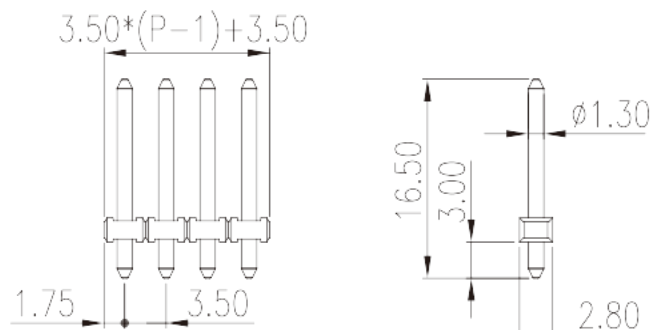

Pitch : 3.50mm, 150V, 8A

	PCB Connector – Socket, Reflow soldering
	PCB Connector – Socket
(mm)	3.50
	Black (default)
	Without
	Reflow Soldering (Temperature condition according to standard IPC/JEDEC J-STD-020E)
(mm)	$3.50 * (P-1) + 3.5$
(mm)	2.8
(mm)	16.5
( x ) (mm)	1.3
PCB (mm)	1.6
( )	02P~24P
	Single level
	HIGH-TEMPERATURE PLASTICS
	IIIa



UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED
MSL	4

**-IEC**

(V)	160
(A)	9
(II/2)(V)	320
(III/2)(V)	160
(III/3)(V)	160
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5

**-UL**

(UL/CUL Group B)(V)	150
(UL/CUL Group B)(A)	8

**&**

	120
	-40

**UL**

(Group B)(V)	150
(Group B)(A)	8

**CUL**

(Group B)(V)	150
(Group B)(A)	8

--	--

