
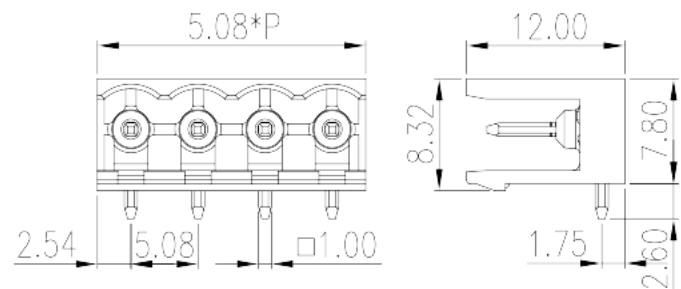


# 2EHDRR-XXPL

PCB &gt; PCB -

:2026-02-09

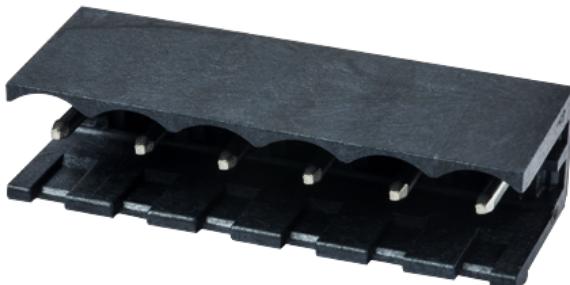

Pitch : 5.08mm, 300V, 15A

	PCB Connector – Socket, Reflow soldering
	PCB Connector – Socket
(mm)	5.08
	Black (default)
	Without
	Reflow Soldering (Temperature condition according to standard IPC/JEDEC J-STD-020E)
(mm)	$5.08*(P-1)+5.08$
(mm)	12
(mm)	7.8
(   x   ) (mm)	1.0x1.0
PCB (mm)	1.60~1.70
(   )	02P~24P
	Single level
	1

HIGH-TEMPERATURE PLASTICS



Delight Through Connections

	IIIa
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED
MSL	1

### -IEC

(V)	630
(A)	18
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4

### -UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10

&amp;

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

### UL

(Group B)(V)	300
(Group B)(A)	15
(Group D)(V)	300
(Group D)(A)	10

**CUL**

(Group B)(V)	300
(Group B)(A)	15
(Group D)(V)	300
(Group D)(A)	10

**VDE**

(V)	630
(A)	18

