



# FDCH508RM-XXP

PCB

&gt; PCB

-

:2026-02-10

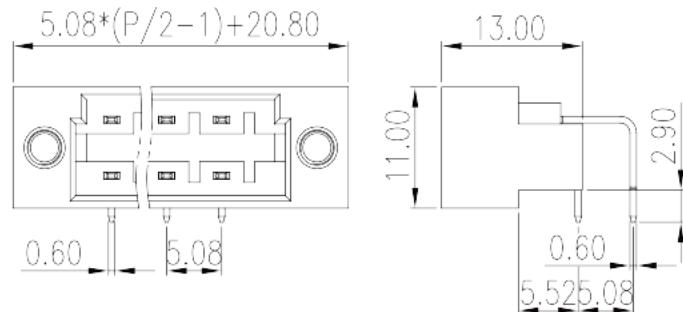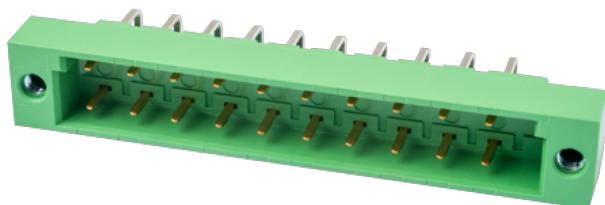

Pitch: 5.08mm, 300V, 6A

	PCB Connector – Socket, Wave soldering
	PCB Connector – Socket
(mm)	5.08
	Green (default)
	With threaded flange
	Wave Soldering
(mm)	5.08*(P/2-1)+20.8
(mm)	13
(mm)	11
(   x   ) (mm)	0.6x0.6
PCB (mm)	1
(   )	20P~44P
	Double level

	PBT
	IIIa
UL 94	V0



Delight Through Connections

	1000M at DC 500V
	COPPER ALLOY
	Tin PLATED

**-IEC**

(V)	320
(A)	6
(II/2)(V)	320
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(N.m)	0.3

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	6
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	6

**&**

가	(YES or NO)	NO
		120
		-40

