


# DP10-TN

DIN

>

:2026-05-15

:1.1

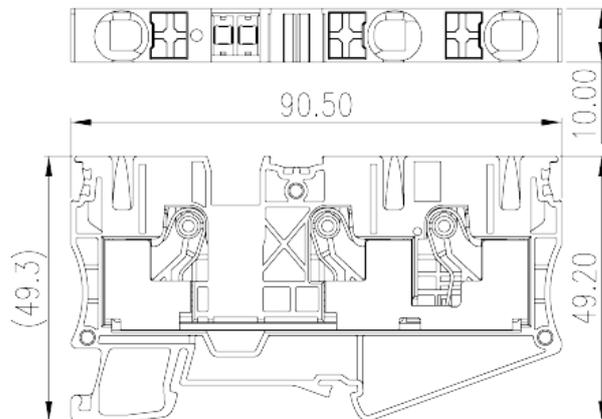

600V, 60A, Beige (default)

	Single level Feed-Through Terminal Block, Push-in Design
	Single level Feed Through Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	90.5
(mm)	10
(mm)	49.3
( )	1P
	Single level
	3
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)		1000
(A)		57
(III/3)(V)		1000
(III/3)(KV)		8
(mm <sup>2</sup> )		0.5
(mm <sup>2</sup> )		16
(mm <sup>2</sup> )		0.5
(mm <sup>2</sup> )		10
(mm <sup>2</sup> )	,	0.5
(mm <sup>2</sup> )	,	10
(mm <sup>2</sup> )	,	0.5
(mm <sup>2</sup> )	,	10
<sup>2</sup> (mm <sup>2</sup> )	,	1.5
<sup>2</sup> (mm <sup>2</sup> )	,	4
Width)(mm)	(Blade thickness x	1.0x5.5
		18
		TS-35、TS-35/15
		YES
		NO

**-UL**

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		60
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		60
UL/CUL	AWG	20
UL/CUL	AWG	6
UL/CUL	AWG	20
UL/CUL	AWG	6



&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	20~6
(Group B)(V)	600
(Group B)(A)	60
(Group C)(AWG)	20~6
(Group C)(V)	600
(Group C)(A)	60

CUL

(Group B)(AWG)	20~6
(Group B)(V)	600
(Group B)(A)	60
(Group C)(AWG)	20~6
(Group C)(V)	600
(Group C)(A)	60

VDE

(mm <sup>2</sup> )	0.5~10
(V)	1000
(A)	57

--	--

