
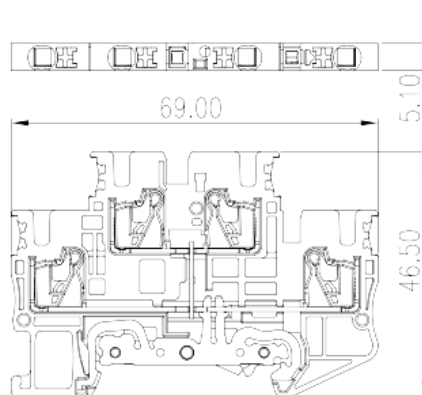


DPP2.5N-PE

DIN

>

:2026-07-05

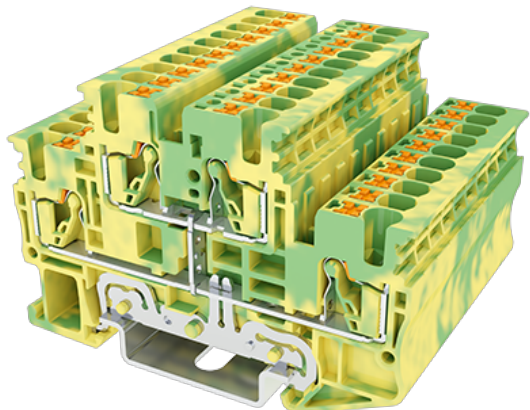

300V, Green-Yellow (default)

	Grounding Terminal Block, Push-in Design
	Grounding Terminal Blocks
	Green-Yellow (default)
	Push-in design
	Rail Mounting
(mm)	69
(mm)	5.1
(mm)	46
()	1P
	Double level
	4
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)		500
(III/3)(V)		500
(III/3)(KV)		6
(mm ²)		0.14
(mm ²)		4
(mm ²)		0.14
(mm ²)		2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
	² (mm ²) ,	0.5
	² (mm ²) ,	0.5
Width)(mm)	(Blade thickness x	0.6x3.5
		10
		TS-35
		YES
		YES

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group C)(V)		300
UL/CUL	AWG	26
UL/CUL	AWG	12
UL/CUL	AWG	26
UL/CUL	AWG	12

&

(YES or NO)		YES
가 (YES or NO)		YES

	120
	-40

UL



(Group B)(AWG)	26~12
(Group B)(V)	300
(Group C)(AWG)	26~12
(Group C)(V)	300

CUL

(Group B)(AWG)	26~12
(Group B)(V)	300
(Group C)(AWG)	26~12
(Group C)(V)	300

VDE

(mm ²)	0.14~2.5
(V)	500

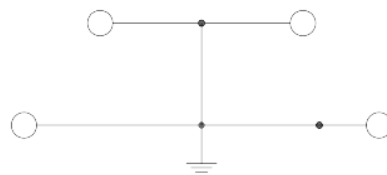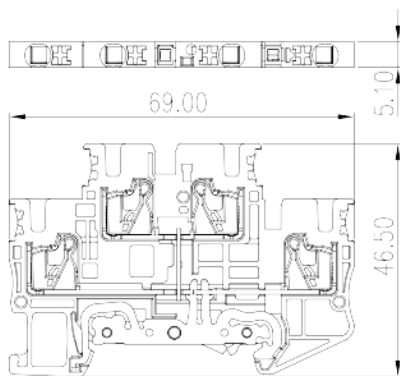



Delight Through Connections