
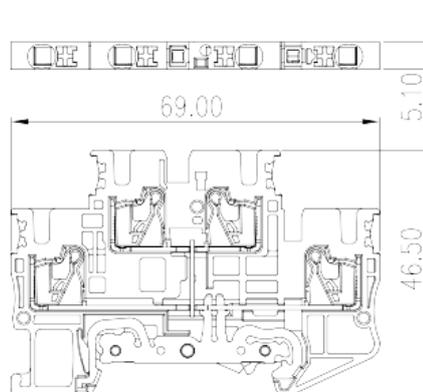


# DPP2.5N-PE

DIN

>

:2026-05-14

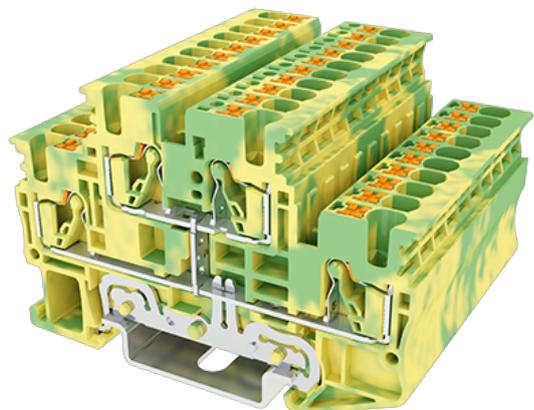

300V, Green-Yellow (default)

	Grounding Terminal Block, Push-in Design
	Grounding Terminal Blocks
	Green-Yellow (default)
	Push-in design
	Rail Mounting
(mm)	69
(mm)	5.1
(mm)	46
( )	1P
	Double level
	4
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)	500
(III/3)(V)	500
(III/3)(KV)	6
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	4
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
Width)(mm) (Blade thickness x	0.6x3.5
	10
	TS-35
	YES
	YES

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group C)(V)	300
UL/CUL AWG	26
UL/CUL AWG	12
UL/CUL AWG	26
UL/CUL AWG	12

**&**

(YES or NO)	YES
가 (YES or NO)	YES

	120
	-40

UL



(Group B)(AWG)	26~12
(Group B)(V)	300
(Group C)(AWG)	26~12
(Group C)(V)	300

CUL

(Group B)(AWG)	26~12
(Group B)(V)	300
(Group C)(AWG)	26~12
(Group C)(V)	300

VDE

(mm <sup>2</sup> )	0.14~2.5
(V)	500

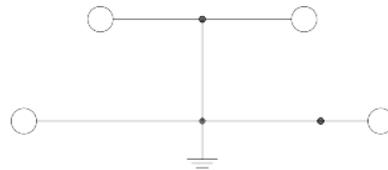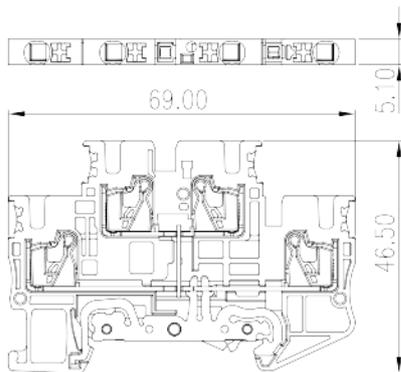



Delight Through Connections